

Service Manual

100_{SERIES}

 **Aqua-Hot**[®]
An AIRXCEL Brand

AHM-125-G02
GASOLINE



Contents

Caution Notes.....2
 Introduction3
 Maintenance Schedule.....6
 System Features7
 Component Cut-Aways9
 Operational Flowchart.....11
 Operating the Aqua-Hot & LCD 12
 Aqua-Hot Controller..... 14
 Controller Replacement Procedure.....18
 Float Switch 20
 High-Limit Thermostat 22
 Low-Temperature Cutoff Thermostat.....24
 Three-Way Valve 25
 Plate-to-Plate Heat Exchanger..... 26
 Tempering Valve27
 Tank Fluid Circulation Pump..... 29
 AC Electric System.....31
 AC Relay 33
 ETS Module 34
 Fuel System Replacement..... 36
 Fuel System Purge Procedure 38
 Burner Troubleshooting 39
 Burner Operation after Service 42
 General Troubleshooting..... 43
 Winterization..... 44
 Appendix A: System Schematics 45
 Appendix B: Parts..... 49
 Appendix C: Measuring Antifreeze 54

Caution Notes

As you read this information, take particular note of the NOTICE, CAUTION, WARNING, and DANGER symbols when they appear. This information is important for safe and efficient use of the Aqua-Hot system.

NOTICE signals a situation where potential damage to the Aqua-Hot could occur.



CAUTION signals a situation where potential harm or risk of minor or moderate injury could occur if you do not follow instructions.



WARNING signals a hazardous situation where potential harm, risk of serious injury, or death could result if instructions are not followed.



DANGER signals a situation where immediate risk of serious injury or death will result if instructions are not followed.



NOTE: This manual will also use notes sections similar to this one to draw attention to features and practices which must be observed.

System Overview

The Aqua-Hot AHM-125G Series is a Hydronic Heating System that can provide heat and hot water on demand using a built-in electric heating element and an external gas burner.

The Aqua-Hot Heating is a 2-in-1 System

1. Interior heating system: provides quiet, comfortable interior heat and even temperatures.
2. Tank-less hot water system: provides a flow of comfortable hot water.

The Aqua-Hot heating system heats an ethylene glycol-based antifreeze (50%) and distilled water solution (50%) that is stored in the Aqua-Hot's boiler tank. This fluid solution must be up to operating temperature before the Aqua-Hot will provide interior heat or hot water. The tank-less hot water system produces approximately **0.8 GPM** of hot water. This system is also hot water priority, so it will shut off the heat any time hot water is called for.

Once the fluid is to temperature (180°F), a fluid circulation pump transports the heated glycol/water mixture through the heating loop and to heat exchangers to evenly warm the RV. Water is heated on-demand by going into a heat exchanger

located in the Aqua-Hot. The water is heated by transfer from the heated antifreeze and distilled water solution. The heated domestic water then flows through the tempering valve to be mixed with cool water from the fresh water tank to achieve an appropriate temperature before it flows to the faucet.

To get the Aqua-Hot to temperature, turn the electric heating element and/or the external gas burner to the "ON" position on the Aqua-Hot LCD screen, or on the RV control panel. It may take up to 20 minutes to get to operating temperature before heat or hot water are available.

For continuous hot water or heat in colder conditions, it is recommended to utilize the external gas burner. The electric heating element will provide heat only in mild conditions and provide light duty hot water needs.

Should additional assistance be needed, please contact the Technical Support at 574-AIR-XCEL (574-247-9235), Monday through Friday, between 7:00am and 4:00pm MST.

NOTE: The image below is just a sample for mounting locations of the Cozy heat exchangers, burner, and Aqua-Hot. Actual placement and quantity may vary on the individual design of the RV. For questions or assistance, contact Aqua-Hot at 574-AIR-XCEL (574-247-9235).

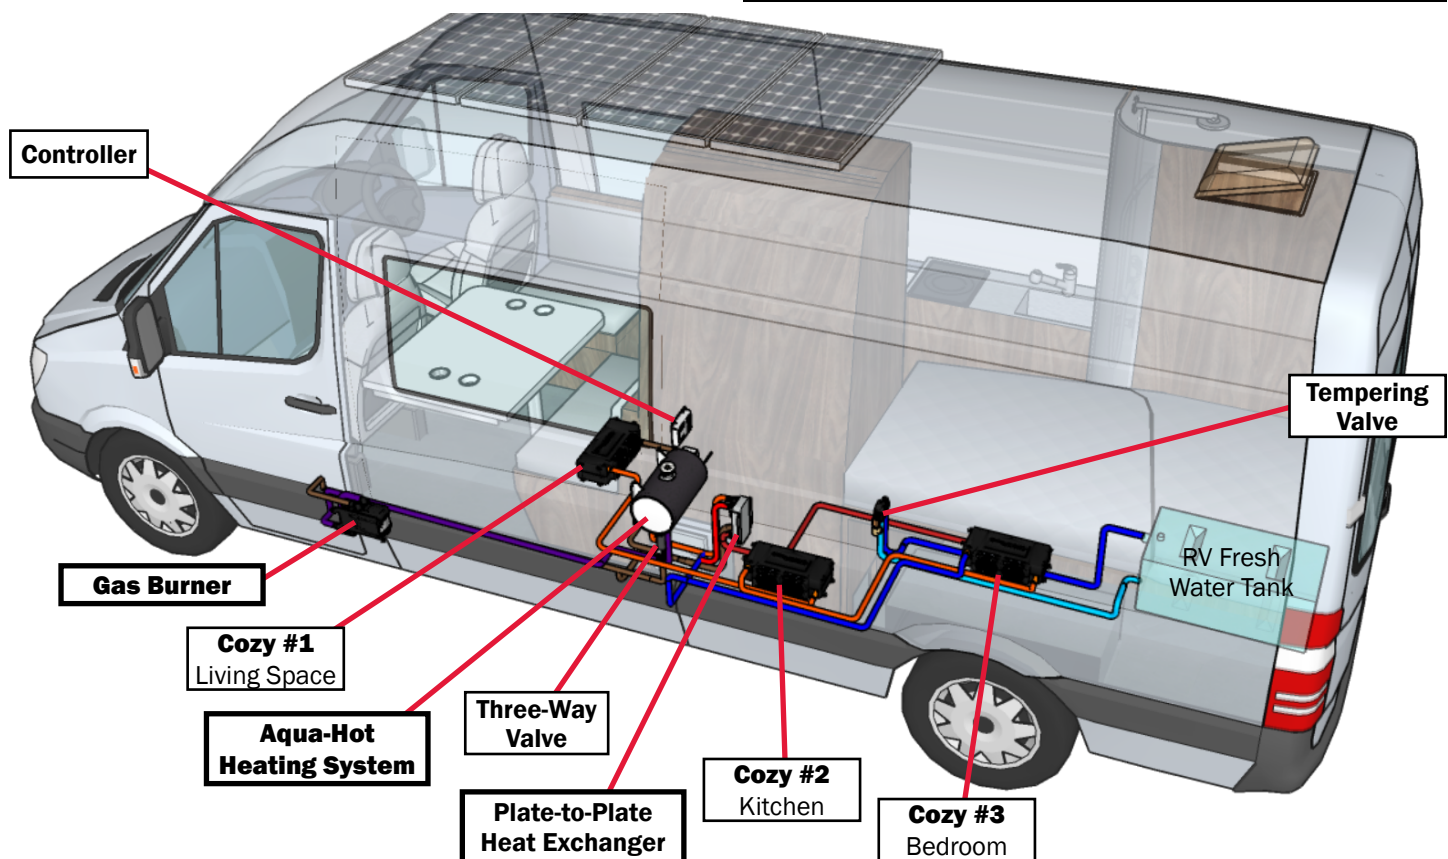


Figure 1

Heat Priority Option:

The Aqua-Hot comes equipped with a three-way valve (sometimes known as the summer/winter valve). This controls the flow of the antifreeze and water heating solution within the Aqua-Hot to deliver either hot water or interior heat as priority. Tapping on this element will change the valve's orientation. When this element is activated, it overrides the automatic function and orients the valve to interior heat. When the element is not activated, the unit is in automatic mode and the valve is automatically oriented based on the Low-Temperature Cut-Off.

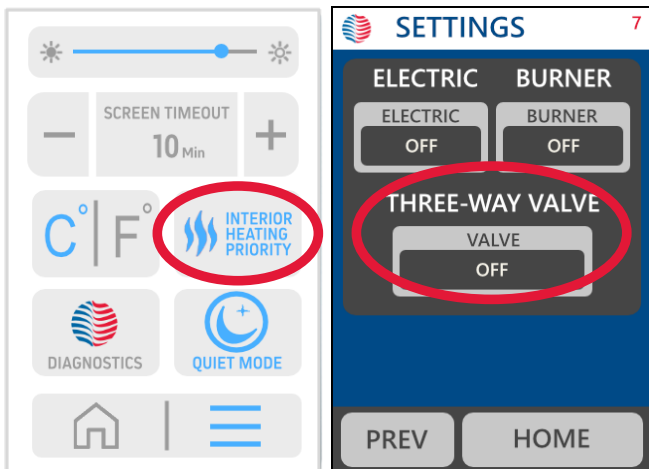


Figure 2

NOTE: Aqua-Hot recommends regular exercise of the Aqua-Hot heating system to avoid issues with starting after a several-month idle period.

NOTE: The Fuel System requires that the gasoline used (in the vehicle for the burner supply) must be 87 octane or greater (87, 89, 91, or 93 octane).



External Gas Burner:

The gas burner is the Aqua-Hot's primary and most powerful heat source, and provides all of the heating and hot water needs when cold temperatures exist, and/or when there is a high demand for hot water. It can be activated by turning the burner on by tapping BURNER to ON on the LCD screen shown below.

The burner has 2 modes: ON and OFF. When the burner is ON, the burner will keep the tank temperature between 160°F and 180°F. The burner will toggle between ON and OFF as needed, using temperature readings from the RV interior thermistors. In OFF mode, the burner is off and will not provide any heat to the Aqua-Hot tank.

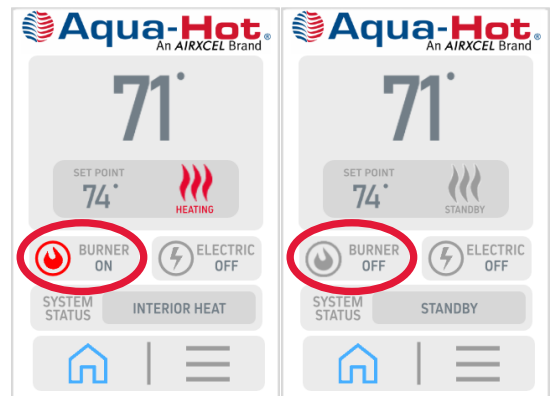


Figure 3

Electric Element:

The electric element is the Aqua-Hot's secondary heat source and can be used when plugged into shore power. The electric element will work to maintain tank temperature at 5°F above the burner activation threshold. It can be activated by tapping on the ELECTRIC button of the LCD screen interface.

The electric element has 2 modes: ON and OFF. When the electric element is ON, the electric element will keep the tank temperature between 165°F and 180°F. The electric element will toggle between ON and OFF as needed, using temperature readings from the RV interior thermistors. In OFF mode, the electric element is off and will not provide any heat to the Aqua-Hot tank.

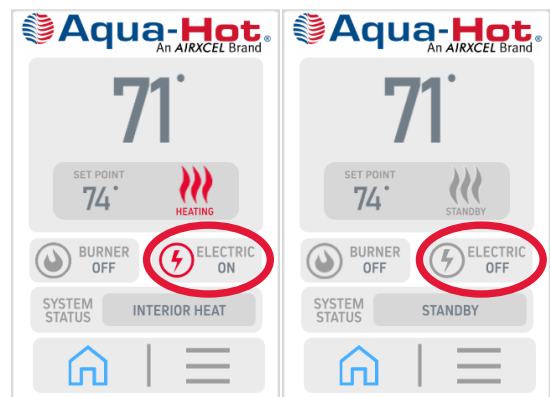


Figure 4

Introduction to this Document

Welcome to the Aqua-Hot AHM-125G Service Manual. This manual will serve as a guide for diagnosing and repairing the Aqua-Hot, how to perform standard maintenance, and guide you through troubleshooting procedures to repair the Aqua-Hot. This service manual is designed to aid trained and qualified technicians to properly service and troubleshoot the Aqua-Hot AHM-125G.

Each section in this manual is dedicated to the diagnosis of specific components within the Aqua-Hot which may be inhibiting the operation of the heater.

Troubleshooting and diagnosis of the Aqua-Hot is most efficiently and effectively accomplished with the Aqua-Hot LCD display, which will relay in plain-language, diagnosis of many Aqua-Hot related issues.



Figure 5

If additional assistance is needed in diagnosing and repairing the Aqua-Hot, please contact our Technical Service Department at 574-AIR-XCEL (574-247-9235) from 7:00am to 4:00pm MST Monday through Friday.



CAUTION

As with any appliance, allow the Aqua-Hot to completely shut down BEFORE disengaging the RV 12V power disconnect.



WARNING

If the information in this manual is not followed exactly, a fire or explosion may result, causing property damage, personal injury, or death.

WARNING!

Read and understand all instructions **before** servicing the Aqua-Hot unit and the external gas burner. Aqua-Hot Heating Systems is not liable for damage resulting from failing to follow instructions contained in this, and any other Aqua-Hot documentation relevant to this unit.

Improper installation, adjustments, service, and maintenance can cause personal injury or loss of life. Reference the service and user manuals **before** maintenance or service.

NOTE: Contact your Authorized Service Center or Aqua-Hot Heating Systems if you have any questions **before** starting any service or maintenance. Information can be found online at www.aquahot.com.

- The product identity label contains specifications of the unit, to what standards it has been tested, and important safety notices.
- Disconnect electric wiring to the Aqua-Hot System before welding or plasma cutting the RV to avoid damage to equipment.
- The Aqua-Hot tank and heating loop operate at 7.0 PSI. Maximum testing air pressure to the tank must not exceed 18 PSI. Exceeding this rating will cause internal damage to the Aqua-Hot.
- Use caution when working on or near any gas systems.
- DO NOT connect the 12-volt DC power to the Aqua-Hot if the vehicle requires welding.
- At maximum operating temperature, the coolant and vapor will be very hot and scalding that may result in serious burns or injury. Be aware of hot surfaces.
- Use special caution when children are present. Children must not be allowed to play with the heater or perform cleaning and/or maintenance.
- Installation and repairs may only be carried out by an authorized, factory-trained Aqua-Hot technician. The heating system must be serviced in accordance with local codes, or, in the absence of local codes, follow NFPA 1192. National safety regulations must be adhered to.

Maintenance Schedule

Monthly Maintenance

Check the Aqua-Hot's antifreeze and water heating solution to ensure that it is at the proper level about once a year. Please note that the coolant level should **ONLY** be checked when the Aqua-Hot is completely cold.



DANGER

The system should **NOT** be checked when the fluid is warm - the M125 is a pressurized system and cause personal injury.

NOTE: It is also recommended to run the gas burner at least once a month for a full cycle (at least 20 minutes) to ensure optimum heater condition.

Annual Maintenance

To maintain the Aqua-Hot at its full potential, it is highly recommended to have the gas burner tuned up annually. This involves cleaning the burner, inspecting the exhaust and combustion air lines for damage and ensuring they are clear, checking the fuel lines for any leaks, and checking the hoses and wiring to make sure there are no damage or cracks.

Replenishing the Heating Solution

If the antifreeze and water heating solution needs replenishing, remove the boiler tank cap and fill it. Replace the cap when this is complete. **DO NOT** operate the unit without first replacing the cap of the tank.

Place a bucket under the overflow hose and turn the burner on. As the tank heats up, any excess heating solution will be vented out of the overflow hose until the tank has reached the ideal fluid level.

The Aqua-Hot does not need regular replacement of the antifreeze and water heating solution, but in the event that more antifreeze is required, contact Aqua-Hot Heating Systems to purchase antifreeze, or for guidance in selecting an appropriate antifreeze product for use with this unit.



DANGER

When the Aqua-Hot is at maximum operating temperature, the coolant is very hot. If the heating system is accessed, scalding by hot vapor/coolant may occur. Before cleaning or servicing, disconnect all power supplies.



WARNING

DO NOT operate the external gas burner and/or electric heating element without antifreeze and water heating solution present in the Aqua-Hot's boiler tank. Doing so will cause serious damage to the heater.

Overheat Protection

Every Aqua-Hot is equipped with an overheat protection device. This is commonly known as the high-limit thermostat. This thermostat operates by maintaining a circuit while the unit is below 218°F.

In the event of an overheat condition, the high limit thermostat will cut the operating signal to the external diesel burner, and/or the electric element. When this signal is interrupted, the electric element and diesel burner will immediately disengage. Contact Aqua-Hot Heating Systems for assistance in locating a qualified person to service this heater.



WARNING

DO NOT attempt to reset the high-limit thermostat after an overheat condition until the unit has been serviced by a qualified technician. Failure to do so could result in damage to the unit, personal injury, or death.

In order to provide the best freeze protection, boil-over protection, anti-corrosion, and rust protection, a mixture of 50/50 ethylene glycol antifreeze and distilled water is recommended. The Aqua-Hot AHM-125G boiler tank holds approximately 2 gallons.

The mixture may be modified to provide the most adequate freezing, boiling, and rust/anti-corrosive protection. A 50/50 mixture of ethylene glycol and distilled water has a freeze point of approximately -35°F and a boiling point of approximately 223°F. Refer to the table below to determine the best protection mixture ratio and also reference page 54 for the proper tool and instructions for use in measuring the system's antifreeze mixture ratio.

Ethylene Glycol to Distilled Water Ratio												
Freeze Point (°F)	32	25	20	15	10	5	0	-10	-20	-30	-40	-50
Concentration (%)	0	10	16	21	25	29	33	39	44	48	52	56



An AIRXCEL Brand

Exhaust system MUST NOT terminate beneath the vehicle and not less than 3 feet from an openable window.

Combustion Air MUST BE supplied from outside the vehicle.

Suitable for water (potable) heating and space heating.

THIS APPLIANCE OPERATES ON BOTH DC AND AC POWER.

USE COPPER CONDUCTORS ONLY!

Use a circuit breaker that cuts power at 20-Amps maximum for over-current protection for the 120-VAC power supply.

Mount the heater and unit to provide easy access for service.



Figure 6

For Detailed Information, reference the Owner's Manual or contact Aqua-Hot Heating Systems Inc. at 1-800-685-4298.

Minimum Service Clearances
 Front - 1 Inch Back - 0 Inches
 Top - 8 Inches Sides - 1 Inch

This appliance must be installed in accordance with local codes or, in the absence of local codes, the Standard for Recreational Vehicles, ANSI A119.2/NFPA 1192 or CAN/CSA-Z240 RV.



Meets or Exceeds: **UL 307A, UL 174**
CSA/CAN B140.0-06
CAN/CSA-C22.2 No. 110-94

Listing 20L01

Max Tank Pressure	7 PSI
Watts (DC)	57W
Watts (AC)	1500W
Tank Capacity	2.0 gal (Ethylene Glycol)
Volts/Amps	12VDC, 7A
Volts/Amps/Frequency	120VAC, 12.5A, 50/60Hz
Burner Model	Belief 5kW Coolant Parking Heater
Burner Fuel	Gasoline
Burner Rating	17,061 BTU/hr

Manufacture Date: MM/DD/YYYY

Model: AHM-125-G02 S/N: M125G02-XXXXXX__

7755 Miller Drive • Frederick, CO 80504 • 574-AIR-XCEL • www.aquahot.com

NOTE: This product label is attached to the side of the Aqua-Hot, and provides a ready reference to specifications, test standards, and important safety notices.

System Specifications

Electric Element

Power Consumption1500 W (maximum)
 Voltage110V AC

DC Power

Power Consumption 57 W (maximum)

Zone Heat Circulation

Pumps 1
 Power Consumption (max).....20W/1.7A
 Voltage 12V DC

Interior Heating

Maximum Heating Zones.....3
 Cozy.....6W/0.5A - 8,000 BTU/hr
 Whisper.....4.5W/0.37A - 4,000 BTU/hr
 H.E. II.....3W/0.25A - 4,000 BTU/hr

NOTE: Control Panel "Quiet Mode" reduces heat exchanger power consumption by 20%

Domestic Water Heating

Maximum **0.8 GPM**

Physical Specifications

Dimensions (US).....15.38"L x 7.90"W x 9.66"H
 Dry Weight42lbs.
 Wet Weight.....60lbs.

All vehicle installations must comply with the requirements listed in the Recreational Vehicle Industry Association's (RVIA) ANSI/NFPA 1192 Handbook for Recreational Vehicle Standards.

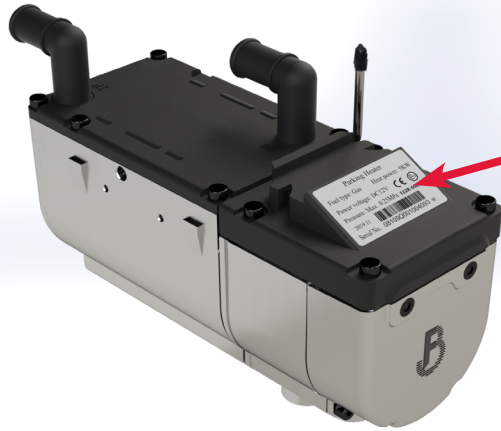


Figure 7

Parking Heater

Fuel type: Gas Heat power: 5KW

Power voltage: DC12V

Pressure: Max. 0.25MPa **122R-000192**

2019.11

Serial No. 08109Q001004093 w

NOTE: This product label is attached to the top of the burner and provides a ready reference to specifications, test standards, and important safety notices.

System Specifications

Gasoline Burner

Heat Flow.....5,188 to 17,060 BTU/hr
 Gasoline Fuel Consumption.....0.05 to 0.17 gal/hr
 Coolant Pump.....20W/1.7A
 Operating Pressure (med heat).....36.25 PSI
 Flow Rate (minimum).....1.5 GPM
 Working Altitude 16,000ft

*Fuel

Fuel Type.....**GASOLINE ≥87 Octane**
 Fuel Consumption (Low Output)..... 0.05g/h
 Fuel Consumption (High Output).....0.17g/h

***NOTE:** The Fuel System requires that the gasoline used (in the vehicle for the burner supply) must be 87 octane or greater (87, 89, 91, or 93 octane).

DC Power

Consumption10 to 37W
 Operating Amp Range..... 0.83 to 3.8A

Operating Temperatures

Burner Operation -40 to 176° F
 Burner Storage..... -40 to 248° F
 Fuel Pump Operation -40 to 86° F
 Fuel Pump Storage..... -40 to 194° F

Physical Specifications

Dimensions..... 8.8”L x 3.4”W x 6.9”H
 Weight.....6.3 lbs

TECHNICAL SPECIFICATIONS	
Heating Medium	Ethylene Glycol/Distilled Water
Thermal Power (W)	High Power Operation: 5000W
	Low Power Operation: 1500W
Fuel	GASOLINE (87 Octane or higher)
Fuel Consumption (gallons per hour)	Low power operation: 0.05 g/h High power operation: 0.17 g/h
Power supply (battery for the engine)	DC12V
Power Consumption (W)	At start <100 W High power operation: 37 W Low power operation: 10 W
Working pressure (MPa)	0.25
Lowest working temperature	-40° F
Net Weight (heater only)	10.6lbs
Working height (above sea level)	16,405 ft
Weight of Main Heater	6.3lbs

All vehicle installations must comply with the requirements listed in the Recreational Vehicle Industry Association's (RVIA) ANSI/NFPA 1192 Handbook for Recreational Vehicle Standards.

Aqua-Hot M125G Heating System	
1. Heating Solution Tank	11. Aqua-Hot Controller
2. Plate-to-Plate Heat Exchanger	12. LCD Screen
3. Tempering Valve	13. AC High-Limit Thermostat
4. Three-Way Valve	14. Float Switch
5. Cozy Heat Exchanger	15. AC Activation Relay
6. Burner Circulation Pump	16. Fluid Fill Port w/ Radiator Cap
7. External Gas Burner	17. Tank Temperature Sensor
8. Fluid Circulation Pump	18. AC Electric Element
9. Coolant Out	19. Domestic Cold-Water Inlet
10. Coolant In	20. Domestic Hot-Water Outlet

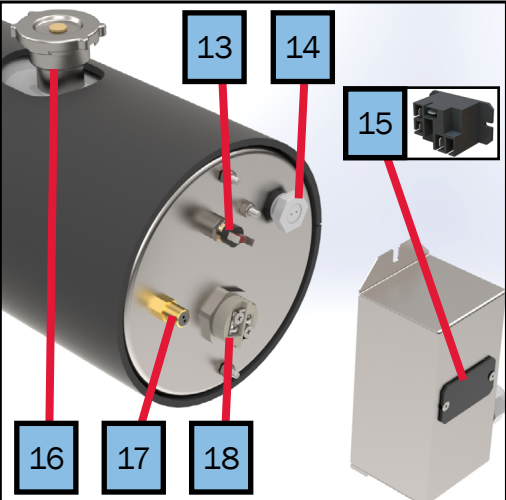


Figure 8




Figure 9




Figure 10

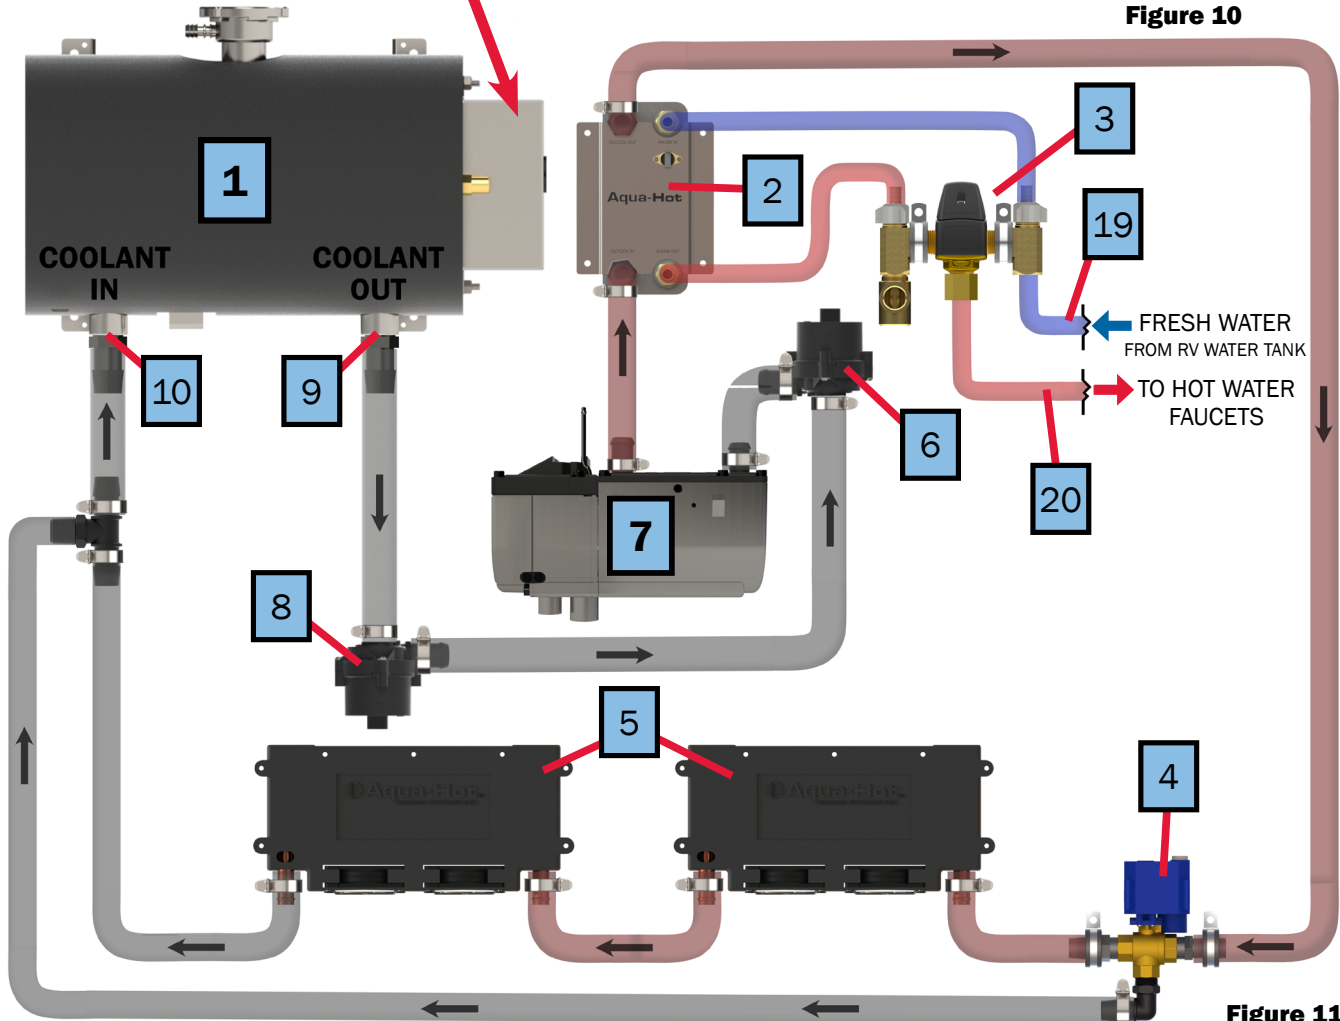


Figure 11



Figure 12

Gas Burner	
1. Combustion Air Fan	11. Muffler
2. Burner Outer Casing	12. Fuel Pipe
3. Burner Inner Casing	13. Coolant Pump
4. Combustion Chamber	14. Fuse
5. Glow Plug	15. Main Harness Connector
6. Flame Sensor	16. Fuel Pump
7. Temperature sensor	17. Exhaust Pipe
8. Over-Heat Sensor	18. Coolant outlet Pipe
9. Burner Controller	19. Coolant Inlet Pipe
10. Air Inlet Pipe	20. Burner



Figure 13


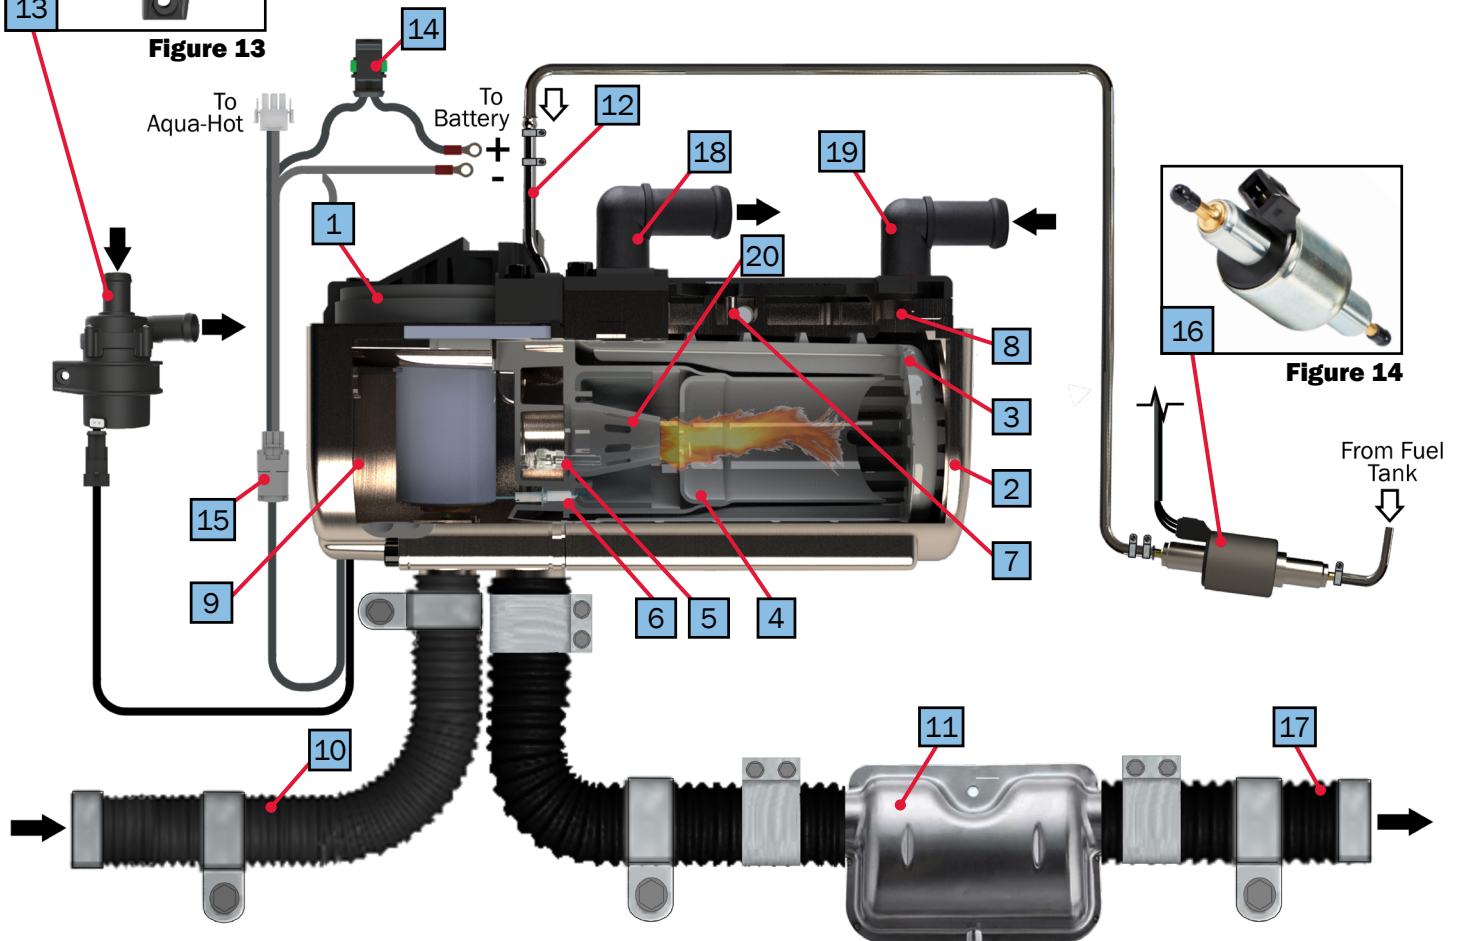


Figure 15

Operational Flow Chart

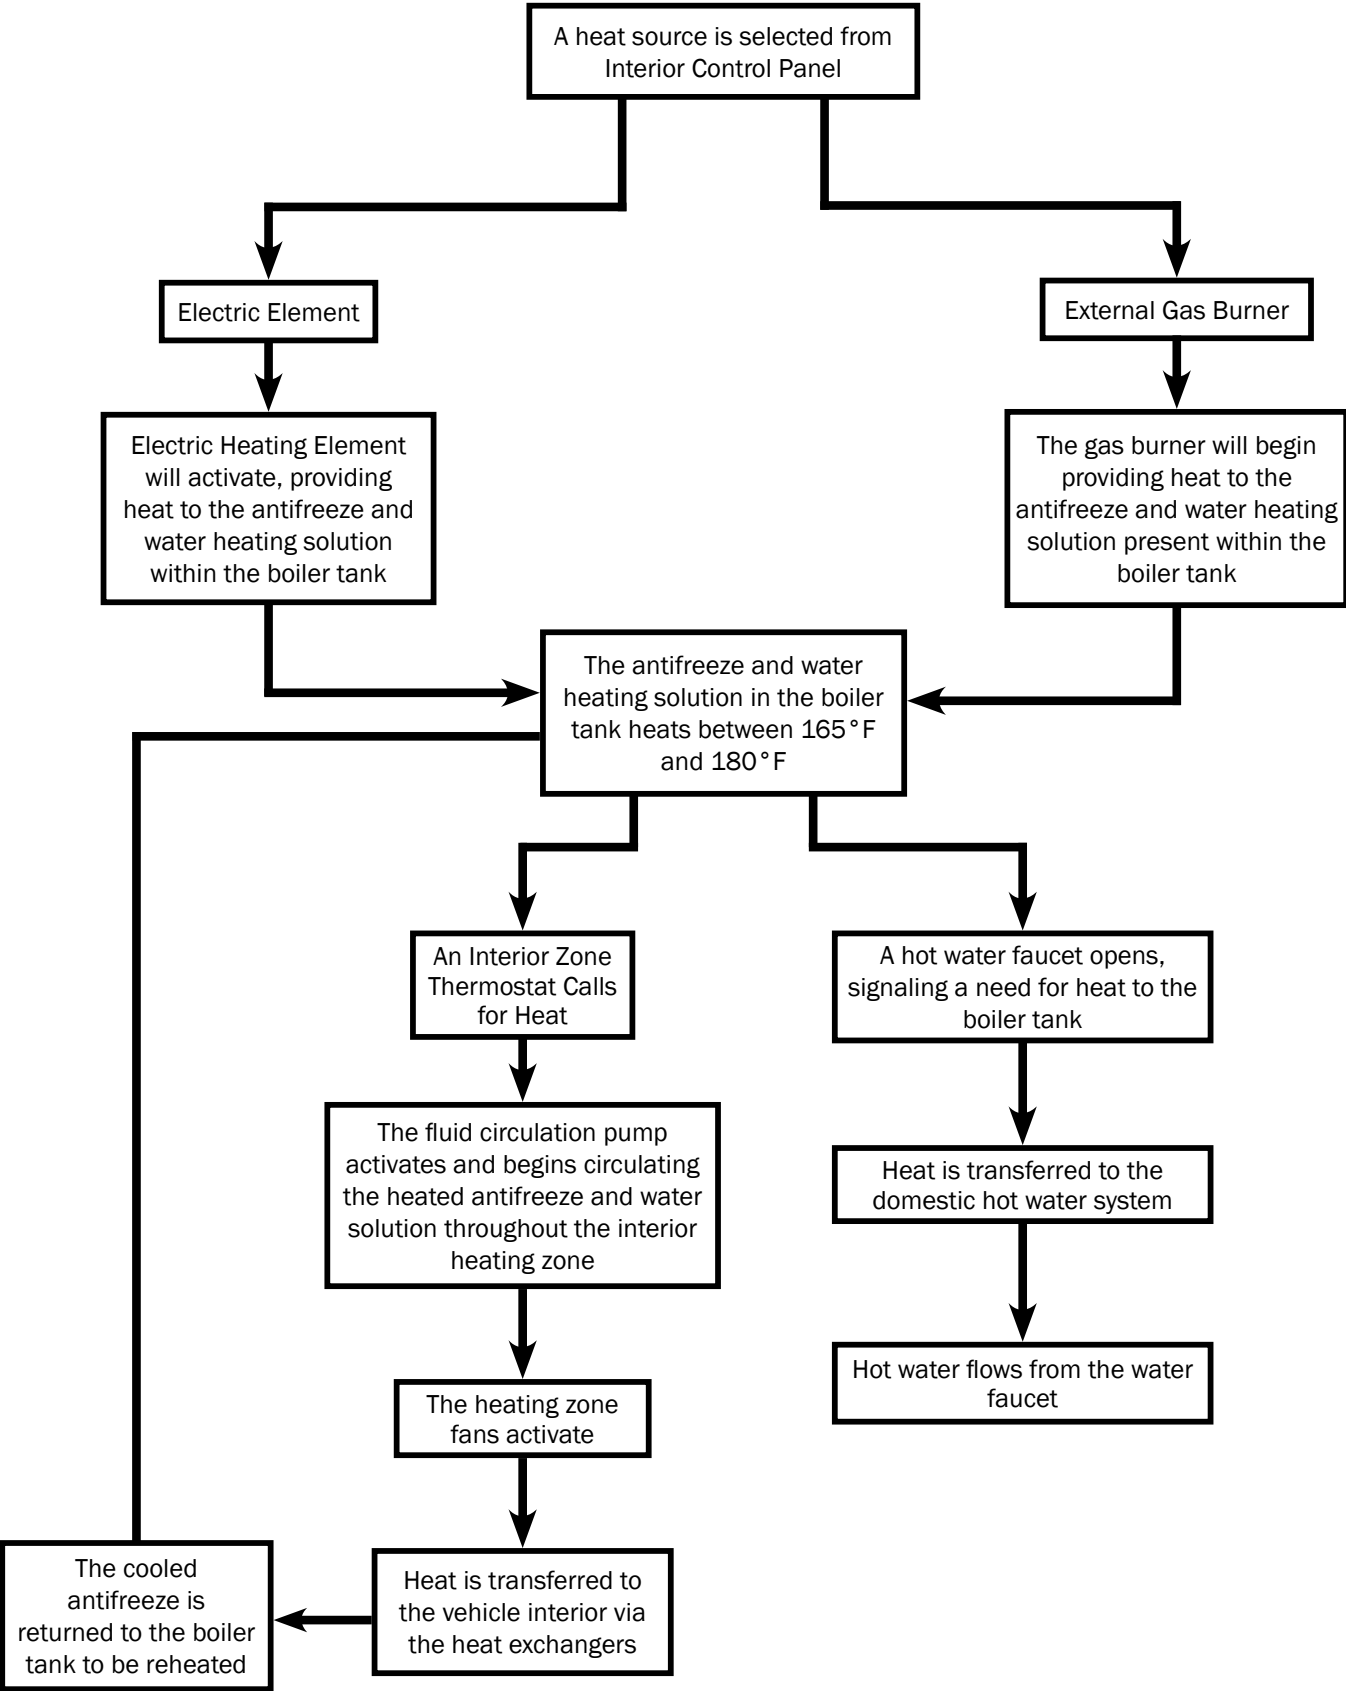


Operating the Aqua-Hot & LCD

This document will outline the basic operating instructions for the Aqua-Hot LCD Screen.

Climate Pages:


The climate pages are for all intents and purposes the “Home” of the LCD screen. From here, the end-user will select their interior temperature set-points, activate or deactivate the gas burner and/or the electric element.

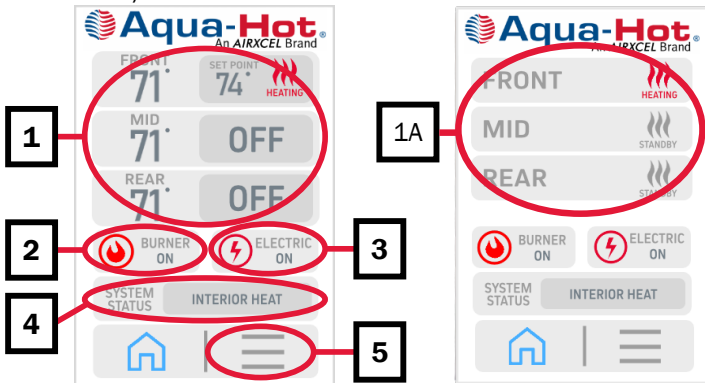

Zone Control **1** **1A**

Precise zone control display will differ depending on the type of zone thermostats used within the RV.

Section 1A demonstrates the appearance of the zone control section when ON/OFF thermostats are used within the RV. In this use-case, these buttons serve only as ON/OFF toggle switches.

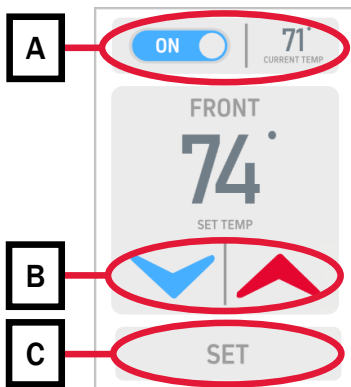

Section 1 demonstrates the appearance of the zone control section when thermistors are used. Tapping on one of the zones shown above will display a new screen where the interior temperature can be set.

Section **A**

This section shows the current zone temperature (shown as 71°F in the example above) as well as a button to turn the zone

on or off. (Setting specific temperatures can only be done *if* thermistors are installed. Thermostats would only show ON/OFF.)

If the zone temperature is set, but this item is not set to ON, the zone heat exchanger will not activate.

Section **B**

These arrows are used to increase or decrease the desired set-point temperature of the zone thermistor.

Section **C**

After the desired temperature set-point has been selected tap “SET” on the LCD to set that temperature. The Aqua-Hot will now work to maintain this interior temperature, and the screen will return home.

External Gas Burner Activation **2**


The external gas burner of the Aqua-Hot can be activated by tapping on the “burner” item on-screen. The gas burner has two modes: ON and OFF.

ON:

While set to ON, the Aqua-Hot gas burner will work to maintain a tank temperature of 180° F.

OFF:

While off, the gas burner will not serve to provide any heat to the boiler of the Aqua-Hot whatsoever.

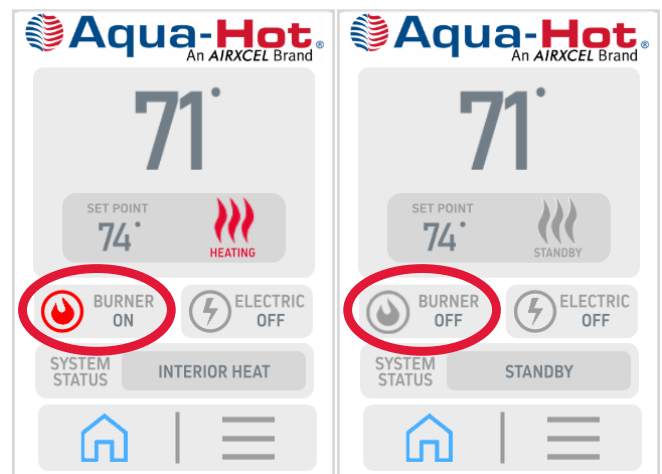

Electrical Element Activation **3**


Similar to the external gas burner, tapping the electric item will signal to the controller to activate the AC electric relay, energizing the 1500W electric element within the Aqua-Hot. The electric element also has two modes: ON and OFF.

ON:

While set to ON, the electric element will work to maintain a tank temperature of 180° F.

OFF:

While off, the element will not serve to provide any heat to the boiler of the Aqua-Hot whatsoever.

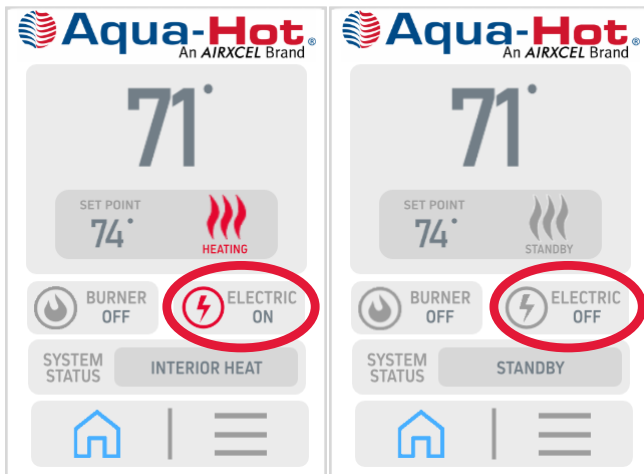


System Status **4**

This item will indicate the current operational status of the Aqua-Hot. If any faults have triggered, those will be displayed here.

During normal operation, this should display either INTERIOR HEAT or HOT WATER relating to the priority and position of the 3-way valve.

While in INTERIOR HEAT mode, the 3-way valve is oriented so as to circulate heated antifreeze and water solution through the heating zones of the RV.

While in HOT WATER mode, the 3-way valve is oriented so that the heated antifreeze and water solution is circulated immediately back into the boiler tank. This is known as “stirring” the tank, and it is done to provide as much heat as possible to the domestic water line while water is flowing.

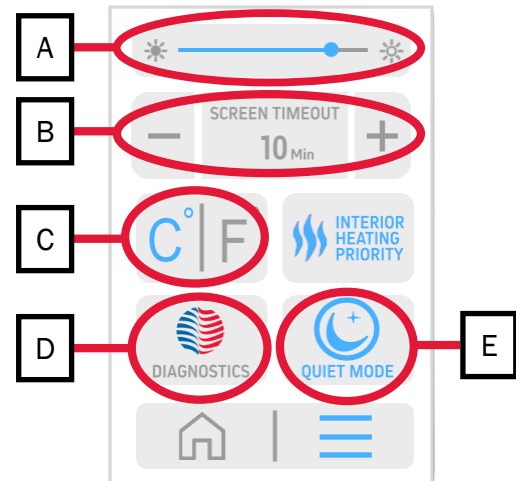

Module Options **5**

Tapping on the module options screen (the 3 lines on the bottom right of the home screen) will display the screen shown above. This is known as the Module Options screen. From here, it is possible to access unit diagnostics, activate Quiet Mode, change the temperature units, adjust screen brightness, and unit timeout.

Screen Timeout **A**

The screen timeout item sets the amount of time required to allow the screen to shut-off when idle.

Screen Brightness **B**

This setting changes the screen brightness.

Unit of Measurement **C**

This setting will change the display units of the Aqua-Hot. Either Fahrenheit or Celsius can be selected.

Diagnostics **D**

Tapping on this element will direct you to the Aqua-Hot’s built-in diagnostic, testing, and troubleshooting tools.

Quiet Mode **E**

This option toggles the Aqua-Hot’s quiet mode. Quiet mode is a setting where the speed and output of the heat exchanger fans is reduced to 80%. This is done to reduce noise of the heat exchangers.

Please note that this feature must be activated and deactivated as needed.

The Aqua-Hot Controller

The Aqua-Hot AHM-125G operates on a controller platform which has been modernized and updated from the previously used Electronic Controllers and Relay Control Boards of older Aqua-Hot units.




Figure 16

This controller is best utilized with the Aqua-Hot 3.5in display. Using the Aqua-Hot with this new display will ensure that you can take advantage of all of the tools and features of this controller.



Figure 17

Features:

This new controller brings with it new features to it which effect functionality from every stage of operation. Fail safe functionality, climate control, and troubleshooting and diagnostics have all been overhauled on this new control architecture. These features will be explained in detail below.

Troubleshooting:

The new troubleshooting functionality is perhaps the largest and most substantial change to come about from the new controller architecture. Many faults and failures within the Aqua-Hot can now be relayed in plain language to the technician servicing the Aqua-Hot. There are five system faults which will be utilized; System Voltage, Low-Level Cutoff, Over-Current, Overheat, and Burner Failed to Ignite. These will be explained below.

System Voltage:

System voltage faults indicate that there is a problem with the RV-side power supply which powers the Aqua-Hot.

The Aqua-Hot can only operate within a voltage range of 11V DC to 16V DC. If voltage drops below 11V, or exceeds 16V DC, the controller will shut down the Aqua-Hot as a safety mechanism.

Low-Level Cutoff:

The Low-Level Cutoff fault will only trigger if the minimum fluid level within the Aqua-Hot is below an acceptable operational threshold.

If the controller is showing a low-level cutoff fault, begin by diagnosing the float sensor.

Over-Current:

Over-current faults are triggered by an output channel (pump, fan, etc) that is attempting to draw too much current through the controller. This fault will be accompanied by the component which triggered the fault, for example “PUMP 2 OVER-CURRENT” will display if Pump 2 is not operating correctly.

If over-current faults are appearing on the display, troubleshoot the offending component listed as being over-current.

Overheat:

Overheat faults indicate that the unit has exceeded its overheat threshold of 210°F.

If an overheat condition has occurred, diagnose the cause of the overheat by investigating the heating sub-systems of the Aqua-Hot (electric and/or gas burner).

Under-Current

Under-current faults indicate a component id drawing too little current. This fault will be accompanied by the component that triggered the fault. If voltage drops below 11V, the controller will shut down the Aqua-Hot as a safety mechanism.

If an under-current fault is displayed on the screen, troubleshoot the offending component listed and also check power into the Aqua-Hot.

The fault codes shown above will cover the most common Aqua-Hot related issues. For more complex issues, it may be necessary to utilize the DIAG screens, which will be explained next.

Diagnostic Screens (DIAG)

The diagnostic screens will show the current operational status of different elements within the Aqua-Hot. By comparing these operational statuses against the expected results it is possible to discern operational issues.

Shown below are the diagnostic screens. From these screens it is possible to see the current status of elements within both the Aqua-Hot and the status of certain elements within the RV such as zone thermostats and on/off signals. Each element on the screens listed below will be explained in detail.

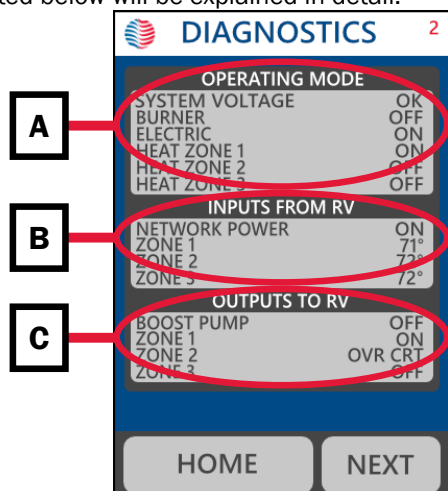


Figure 18

Operating Mode **A**

The operating mode contains six items which relay at-a-glance information about the function of the Aqua-Hot.

System Voltage:

This section of the Operating Mode page indicates the status of the supply voltage to the Aqua-Hot. This will display “OK” if the supply voltage is between 11V DC and 16V DC.

If this element displays anything except “OK” begin troubleshooting the RV-side voltage.

Burner:

This indicates the current burner status as either ON or OFF. It does not indicate a fault or that the burner is running.

ON indicates that the burner is active, and able to fire to provide heat.

OFF indicates that heat is either not required or not requested by the controller.

FAULT indicates that there is an issue with the burner.

Electric:

The Electric section indicates the controller’s current handling status of the AC electric relay.

This status only indicates that the element switch is ON or OFF.

Heat Zone #:

The next three elements indicate the current status of the heating zones (maximum 3).

This element (ON or OFF) only indicates that the zone thermostat is requesting heat. It does not indicate that power is being supplied to the cozy fans. If the LTCO is in hot water mode, this will read “ON”, but the cozy fans will not be running. It only indicates that the thermistor/thermostat is calling for heat.

Inputs from RV **B**

The Inputs from RV section will display the signals received from within the RV as pertaining to the RVC network and the heating zone thermostats.

With respect to the zones, there will be three different items displayed next to the Zone # items depending on the type of RV-side thermostat in use.

- ON: This indicates that the zone is active, and the zone thermostat is calling for heat
- OFF: This indicates that heat is either not needed, or not requested by the zone thermostat
- 71°: This indicates the temperature reading from the thermistor in the RV, not the temperature set points of the zone.

Outputs to RV **C**

The Outputs to RV indicates that the controller is sending power to components within the RV. This section may also show faults with components in each zone.

In the example in Figure 18, the controller is not sending power to the boost pump, so the boost pump is shown as OFF.

Zone 1 is ON, meaning that the controller is sending power to the Zone 1 fans.

Zone 2 is Over Current, indicating that there may be a problem with the fans in this zone.

Zone 3 is not active. The controller is not receiving a request for heat from the RV, and it is not powering the zone fans.

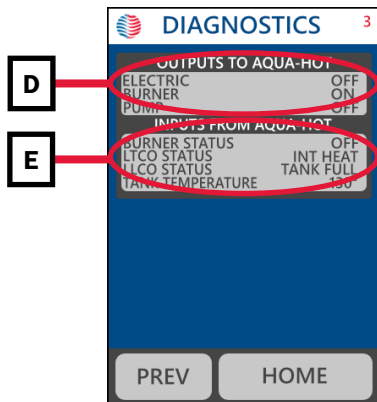


Figure 19

Outputs to Aqua-Hot **D**

The Outputs to Aqua-Hot section describes the current status of the controllable elements within the Aqua-Hot which are the Burner Status, Fluid Circulation Pump, and the Electric Element.

This indicates only that the controller is attempting to operate these elements, not their current functional status.

Inputs from Aqua-Hot **E**

The Inputs to Aqua-Hot will contain the current readings from sensors within the Aqua-Hot. Four elements will be shown on this page; Burner Status, LTCO Status, LLCO Status, and Tank Temperature.

Burner Status:

The Burner Status element on this page indicates the status of the external gas burner.

LTCO Status:

The LTCO status indicates the sensor reading from the Low-Temperature Cutoff Thermostat, which is the device that governs whether to provide heat or hot water.

LLCO Status:

LLCO status relays the present sensor reading of the Low-Level Cutoff sensor located on the boiler tank.

The LLCO is implemented to measure the fluid level within the boiler tank to ensure that it does not drop below a safe threshold.

Tank Temperature:

The Tank Temperature status will display the current temperature of the antifreeze and water heating solution within the Aqua-Hot.

The ETS Thermistor (short for engine temperature sensor) provides the temperature reading to the controller to determine when the external diesel burner and/or electric element shut off.

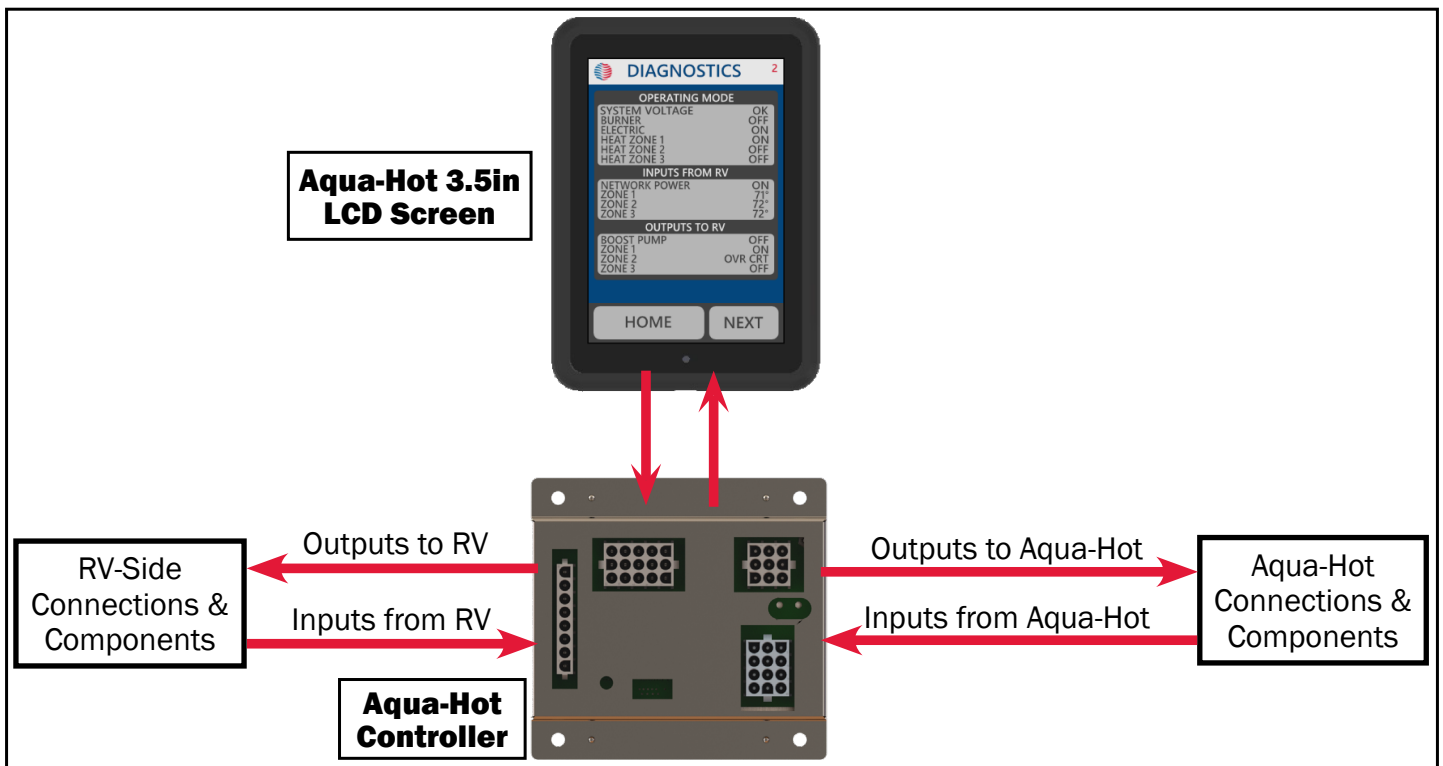


Figure 20

Testing Functionality:

One of the new features of this control system is the ability to independently activate specific elements within the Aqua-Hot for testing purposes.

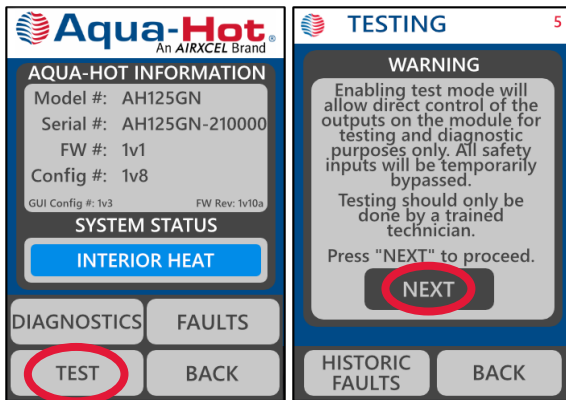


Figure 21

This will allow a technician to activate specific elements within the Aqua-Hot as needed without jumping wires or utilizing external power supplies in most troubleshooting cases. Any elements activated via the testing screen will remain active for a maximum of five minutes.

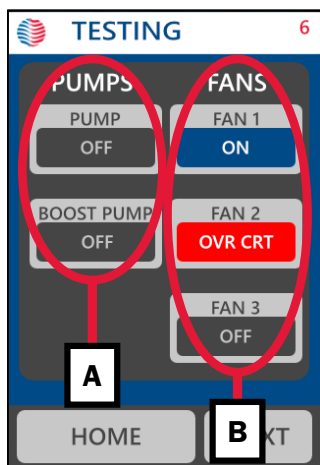


Figure 22

Pumps **A**

Both the zone circulation pump and the boost pump (if applicable) can be activated by tapping the corresponding pump on the test screen.

Fans **B**

All three zone fans can be activated as needed to test communication between the zone fans and the controller. Please note that this will only work if the zones have been directly wired to the Aqua-Hot as described in the installation manual.

Heating sub-systems can be activated independent of their control circuits and other control sensors as a means of testing functionality. These systems will activate for a maximum of five minutes before shutting down.

Activating heating sub-systems in this manner will disregard all sensor inputs while attempting to activate these heating systems. As such, if the unit is near operating temperature, activating these systems may trigger an overheat condition.

DO NOT attempt to activate these sub-systems while the unit is near operating temperature

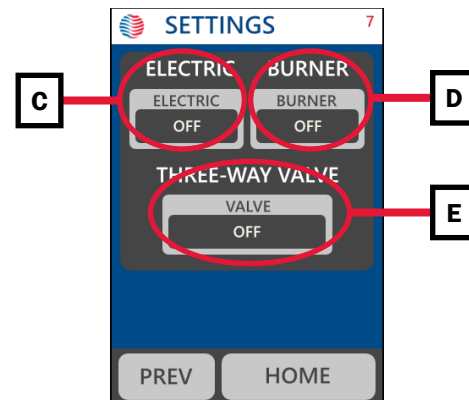


Figure 23

Electric **C**

Activating the Electric heating sub-system will energize the relay which controls the AC electric element.

After tapping this button on the screen, there should be an audible click from within the Aqua-Hot boiler tank. If there is no such click, verify the functionality of the AC electric relay.

This test CANNOT directly energize the AC electric element. It is used only to verify the functionality of the command and control system.

Burner **D**

This element will energize the Gas Burner signal wire, which will then trigger the heat source to activate.

Three-Way Valve **E**

The final element on this screen is not directly related to the heating subsystems of the Aqua-Hot.

The three-way valve (sometimes known as the summer/winter valve) controls the flow of the antifreeze and water heating solution within the Aqua-Hot to deliver either hot water, or interior heat as requested.

Tapping on this element will change the valve's orientation. When this element displays "INT. HEAT" this valve is oriented to provide interior heat by circulating heating solution throughout the interior heating zone. When this element displays "HOT WATER" the valve is oriented such that heating solution is routed so that hot water can be prioritized.



WARNING

Heating sub-system testing is NOT a substitute for normal operation, and attempting to use it as such may result in catastrophic damage to the Aqua-Hot.

Controller Replacement Procedure:

1. If possible, tap the three lines icon at the bottom right corner of the LCD screen.
 - Tap the DIAGNOSTICS icon. Record all the information in the “Aqua-Hot Information Section”.
 - Tap and hold (for 3 seconds) within the information section.

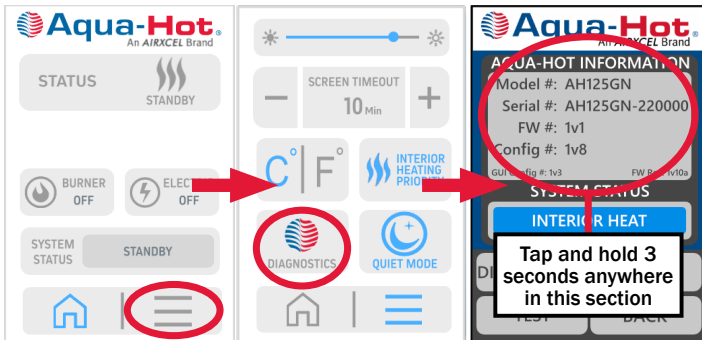


Figure 24

- Tap OPTIONS, CLIMATE ZONES, and take a picture of this screen.

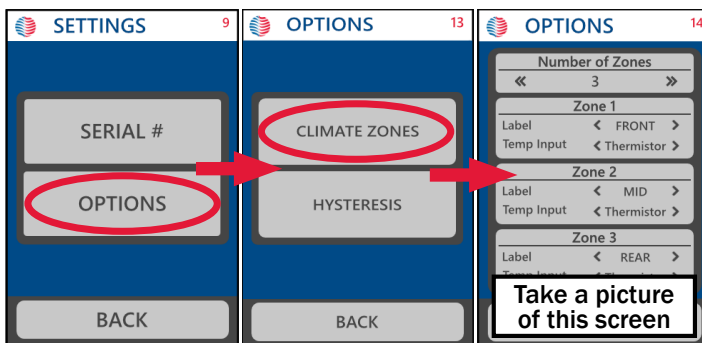


Figure 25

2. Disconnect all power to the Aqua-Hot.
3. Remove the plugs from the controller and disconnect the DC harness from the controller.
4. Unscrew the four screws attaching the sheet metal cover/housing to the wall, and remove the defective controller.




Figure 26

5. Install the replacement controller using the 4 screws previously removed.
6. Carefully reinstall all of the plugs from the DC harness.
 - Ensure that both tabs for all Molex connectors click into place indicating a properly seated connection.
 - Ensure that the single tab for the RVC cable clicks into place indicating a properly seated connection.

NOTE: All plugs have only ONE correct orientation. Do **NOT** force the plug into place.

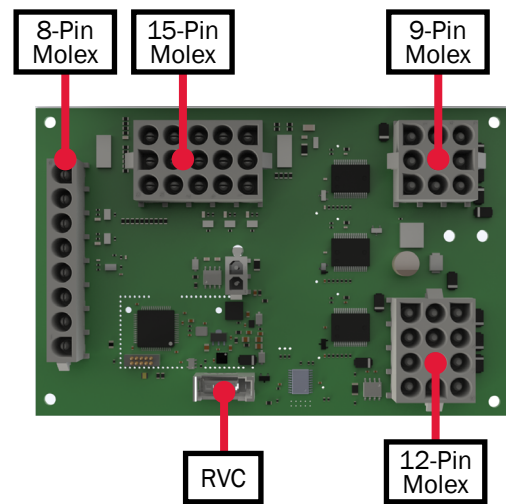


Figure 27

Continue to the next section to set up the controller after installation is complete.

Instructions for Controller Setup after Installation:

After replacement and installation of the controller, the system will need to be updated via the LCD Screen or RV Control panel.

1. Provide power to the main harness of the Aqua-Hot. After the screen lights up, tap the three lines icon on the bottom right corner. Complete the following steps in order:
 - Tap the DIAGNOSTICS ICON
 - Tap and hold (± 3 seconds) in the “Aqua-Hot Information” section
 - Tap SERIAL NUMBER and follow the prompts on the screen.

NOTE: If serial number was not recorded before replacing the controller, the serial number can be found on the boiler tank by the fill port.

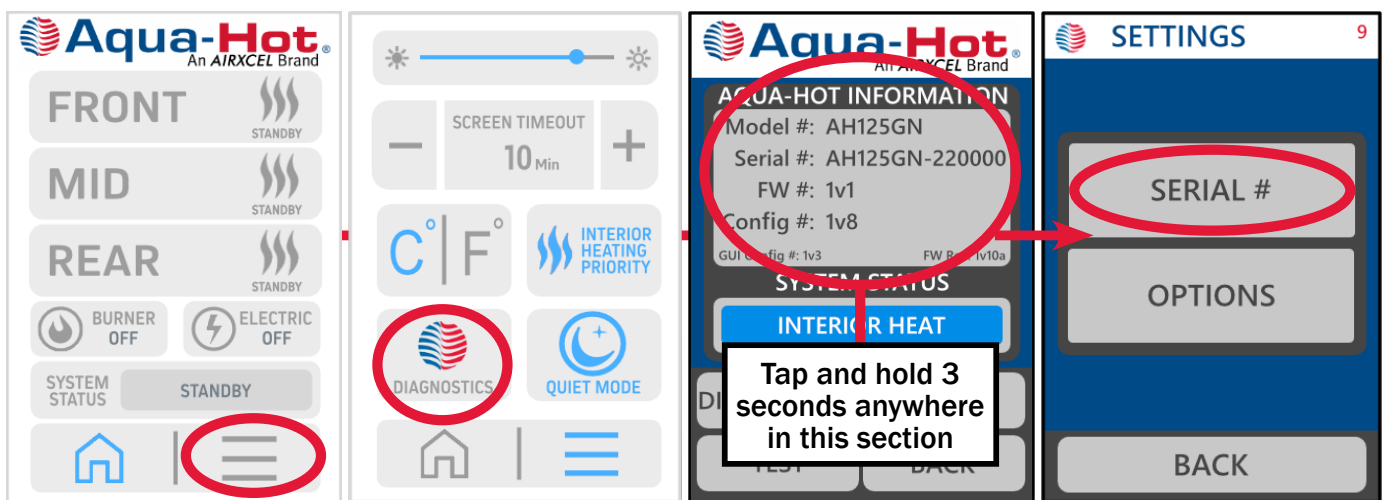


Figure 28

2. After completing Step 1, go back to the “Diagnostics” page, tap and hold (for 3 seconds) in the “Aqua-Hot Information” section.
 - Tap OPTIONS, CLIMATE ZONES, and then select the number of climate zones (A).
 - Choose a label and temperature input type for each zone (B).
 - Tap BACK until you’ve reached the “Home Screen”.

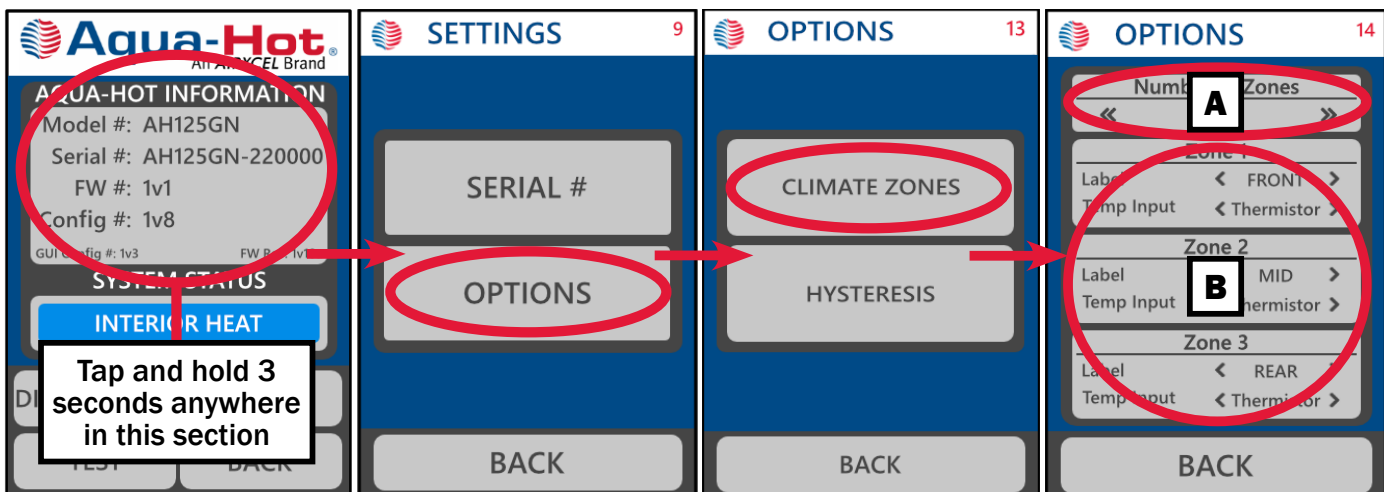


Figure 29

3. Test for normal operation.

Float Switch

The float switch monitors the fluid level within the Aqua-Hot. This device is intended as a fail-safe measure which will disengage the Aqua-Hot if the fluid ever drops below a set threshold. The float switch is located on the boiler tank face behind the AC cover.

If the float switch is malfunctioning, the Aqua-Hot will not function and a low level fault will be displayed. Troubleshoot this switch if there is an adequate amount of fluid present within the Aqua-Hot, and the unit does not operate.

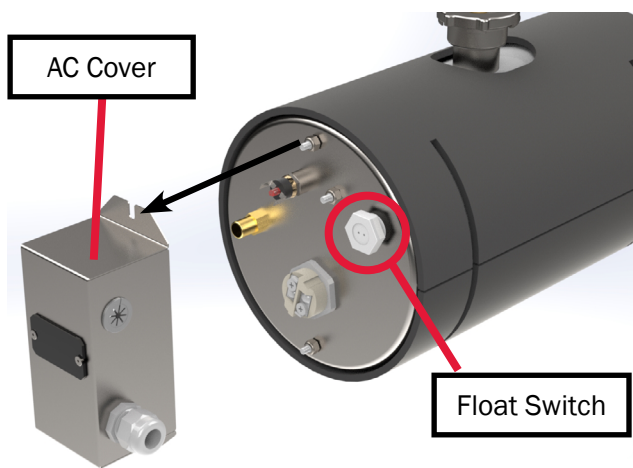


Figure 30


Troubleshooting Guidelines:

Before troubleshooting the float switch, ensure that the following requirements have been met:

- Ensure that the unit is completely cool.
- The tank is filled with heating solution.
- Verify that all RV-side in-line fuses are functional.
- Ensure that DC electrical power is supplied to the Aqua-Hot.
- Ensure that AC electrical power is supplied to the Aqua-Hot's electric element.

If any of the requirements above are not fulfilled, correct them before continuing to diagnose the float switch. Reference the troubleshooting guide to the right.

Troubleshooting Procedure:

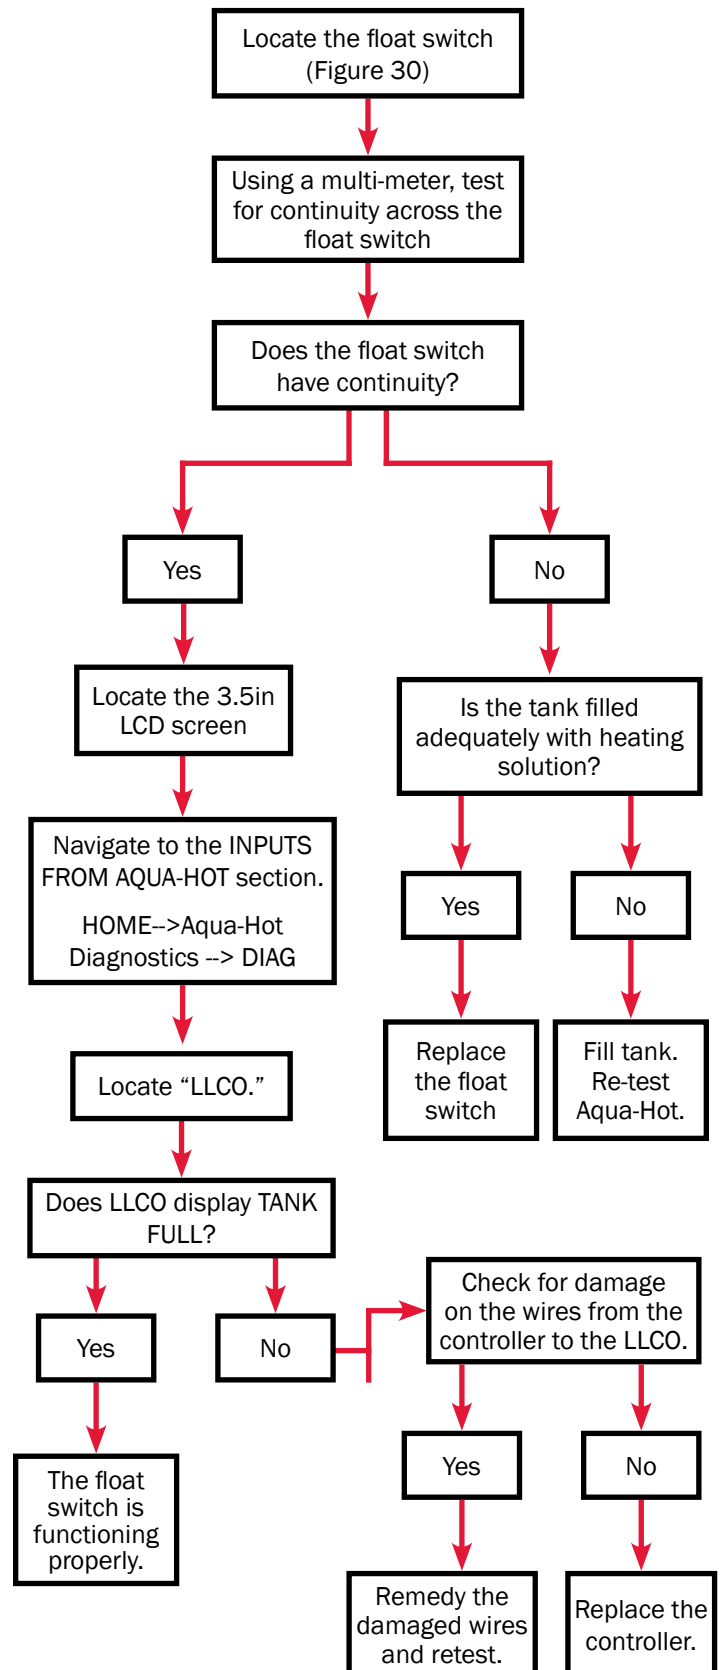



WARNING

Before continuing to the replacement procedure, ensure that the unit has cooled to ambient temperature, all power sources have been disconnected, and the unit is completely shut off.

Replacement Procedure:

In order to replace the float switch, a float switch kit with the switch and the quick disconnect terminal must be ordered. Please visit www.aquahot.com or call 574-AIR-XCEL (574-247-9235) to order the kit (part number ELX-135-M01). Once you have the replacement part in hand, follow the procedure below.



Figure 31

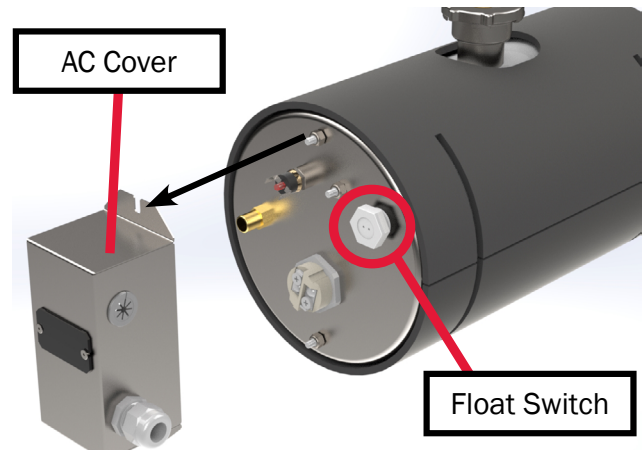


Figure 32

1. Remove the AC cover that protects the components on the tank face.
2. Grab a bucket or drain receptacle and place it directly under the lower fitting of the boiler tank.
3. Remove the clamp from the lower fitting of the tank.
4. Remove the hose and allow the excess fluid to drain into the bucket.
5. Disconnect the Faston connectors, remove the defunct float switch, and discard the switch.
6. Secure the new switch in position.
7. Crimp the new faston connectors to the new float switch.
8. Connect these wires to their receptacles on the Aqua-Hot harness.
9. Reconnect the hose to the lower fitting.
10. Fill the tank with the previously drained fluid.
11. Remove the hose clamps.
12. Test the Aqua-Hot for normal functionality.

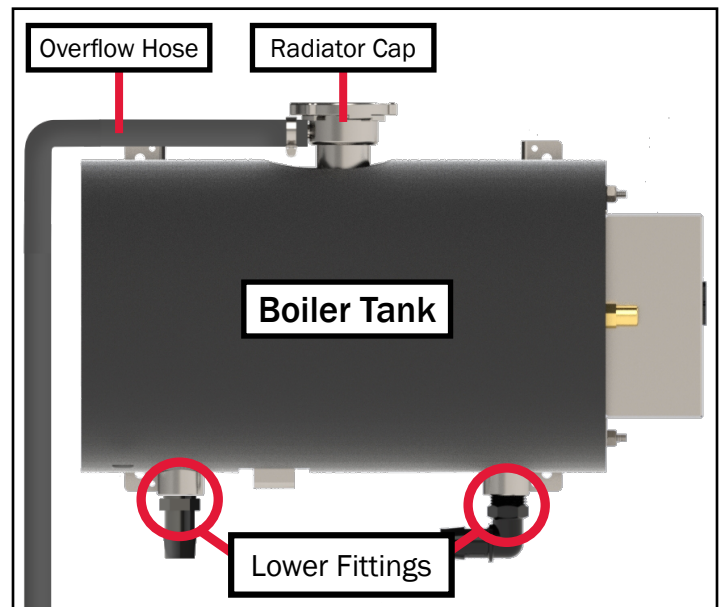


Figure 33

If additional assistance is required please contact the Aqua-Hot Heating Systems Technical support department at 574-AIR-XCEL (574-247-9235) from 7:00am to 4:00pm MST Monday through Friday.

High-Limit Thermostat

The Aqua-Hot is equipped with a resettable High-Limit Thermostat. This thermostat is in place to prevent the heater from operating beyond its safe operational threshold. This thermostat is resettable and easily replaceable.

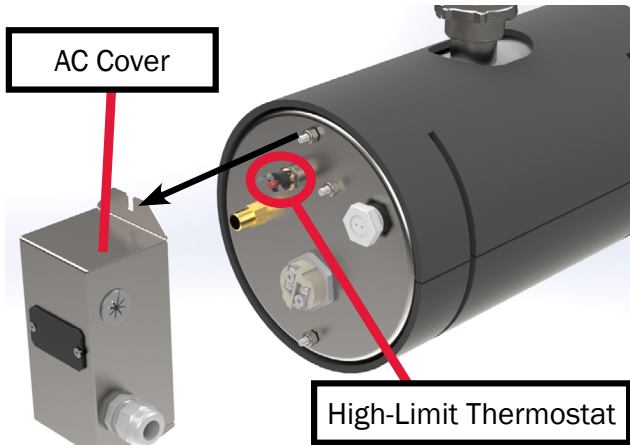


Figure 34

Begin troubleshooting the High-Limit Thermostat if the controller issues an overheat fault, or the electric heating element fails to operate correctly.

Troubleshooting Guidelines:

The following conditions must be met before the High-Limit Thermostat can be diagnosed, and if necessary, replaced.

- The tank is filled adequately.
- Verify that all in-line fuses are functional.
- Ensure that the unit is completely cool.
- Ensure that DC electrical power is supplied to the Aqua-Hot.
- Ensure that AC electrical power is supplied to the Aqua-Hot's electric element.

WARNING

Before continuing the diagnosis, AC power **MUST** be disconnected. Any time the AC cover is removed, the AC power supply must be disconnected to avoid serious injury or damage to the RV or system. To verify that the element is working, the AC power does not need to be connected.

If any of the above conditions are not met, correct them before continuing with troubleshooting. Results of the troubleshooting procedure cannot be verified if the conditions listed above are not fulfilled.

Troubleshooting Procedure:


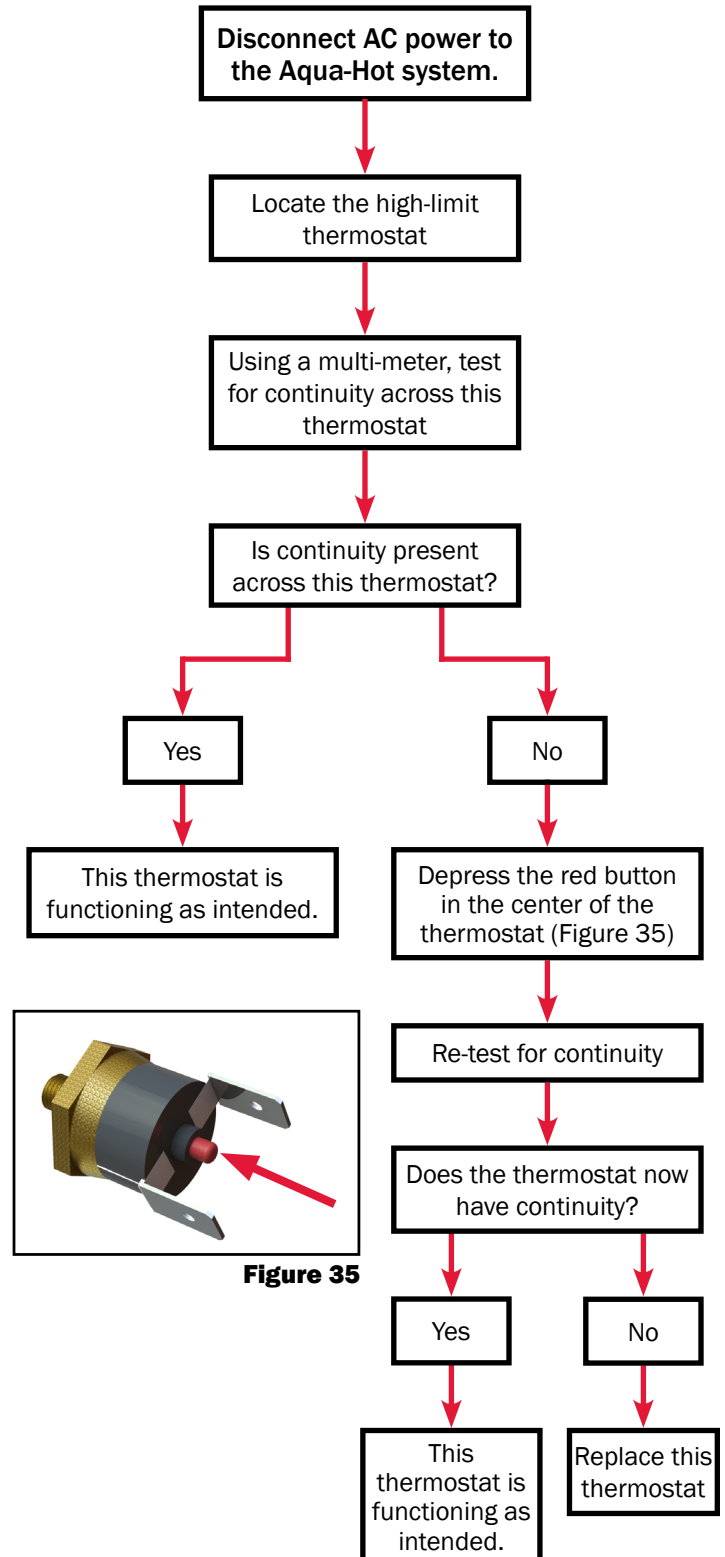


Figure 35

Replacement Procedure:

If it has been determined that the high-limit thermostat needs to be replaced, it can be easily replaced by following the directions below.

1. Disconnect all sources of AC and DC power from the Aqua-Hot (the AC access cover will need to be removed - see Figure 36).
2. Disconnect the wires which connect to the non-functional high-limit thermostat.
3. Using a $\frac{5}{8}$ " (16mm) wrench, remove the thermostat from its location on the boiler tank.
4. Locate the new thermostat and secure it in place of the old thermostat.
5. Reconnect the disconnected wires.
6. Test the Aqua-Hot for normal operation.

If issues persist, please contact Aqua-Hot Heating Systems for additional assistance.

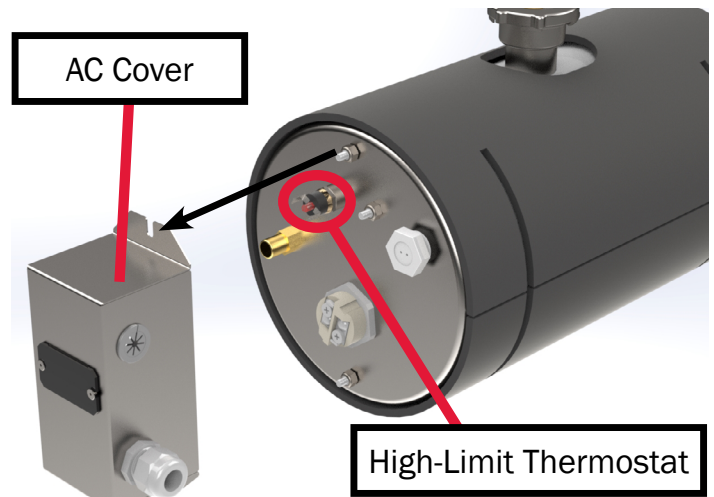


Figure 36

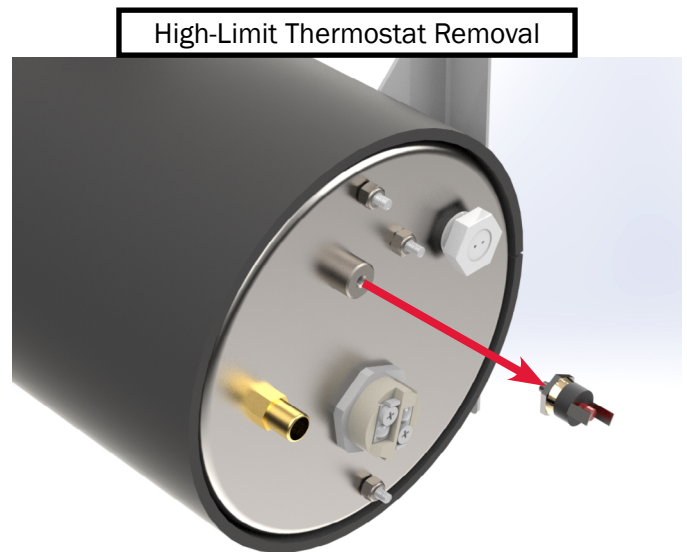


Figure 37

Low-Temperature Cutoff Thermostat




Figure 38

The Low-Temperature Cutoff Thermostat (LTCO) is installed to measure the incoming domestic water temperature. Using that reading, the Aqua-Hot controller is able to determine whether a demand for hot water exists or not.

This thermostat should be diagnosed if there is a lack of interior heat or hot water and the tank is up to operating temperature. Follow the directions below to diagnose, and if necessary, replace the Low-Temperature Cutoff Thermostat.

Troubleshooting Procedure:

Use the following troubleshooting tree to diagnose the Low-Temperature Cutoff Thermostat. The thermostat is located on the face of the plate-to-plate heat exchanger as shown below.



Figure 39

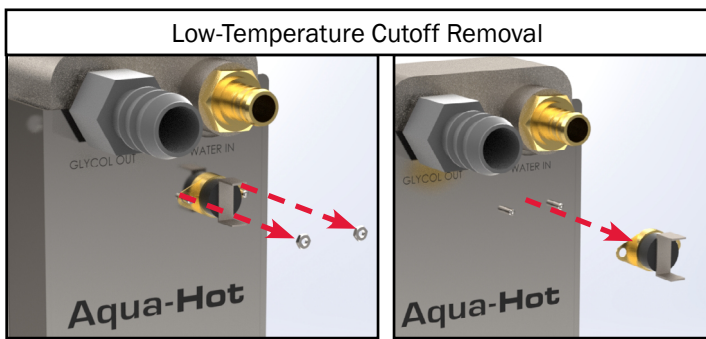
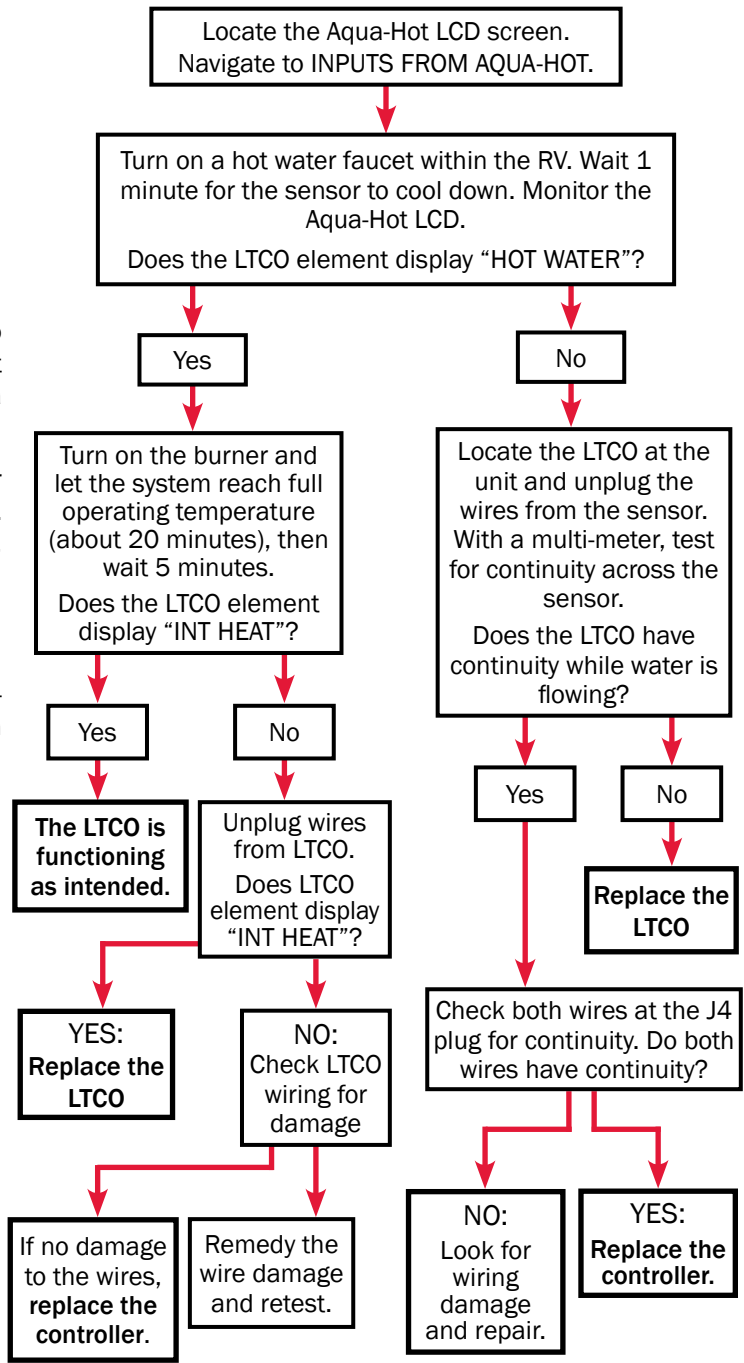


Figure 40

Replacing the Low-Temperature Cutoff Thermostat:



1. Disconnect all sources of AC and DC power from the Aqua-Hot
2. Disconnect the wires from the LTCO.
3. Remove and discard the defunct LTCO thermostat using a 3/16" socket.
4. Position and secure the new LTCO thermostat into place.
5. Connect wires J4-1 and J4-2 to the new LTCO thermostat.

Three-Way Valve

The three-way valve (aka the summer/winter valve) is responsible for changing the flow of coolant either through the interior heating zone (int heat) or circulating coolant within the boiler tank (hot water mode) to prioritize hot water.

If the three-way valve has failed, it can lead to a loss of interior heat and/or hot water. Follow the steps below to troubleshoot the three-way valve.

Troubleshooting Procedure:

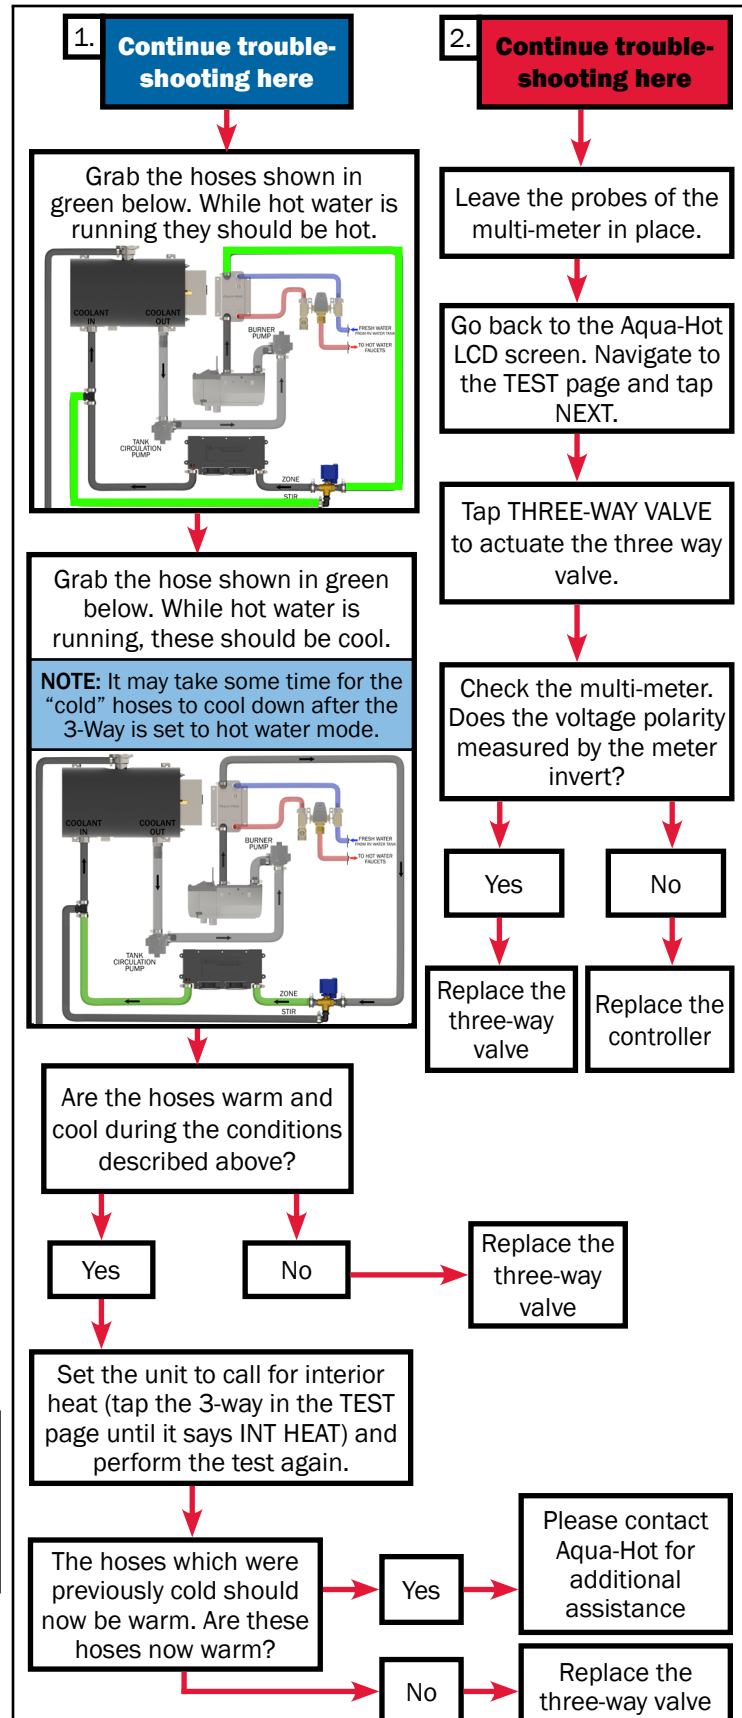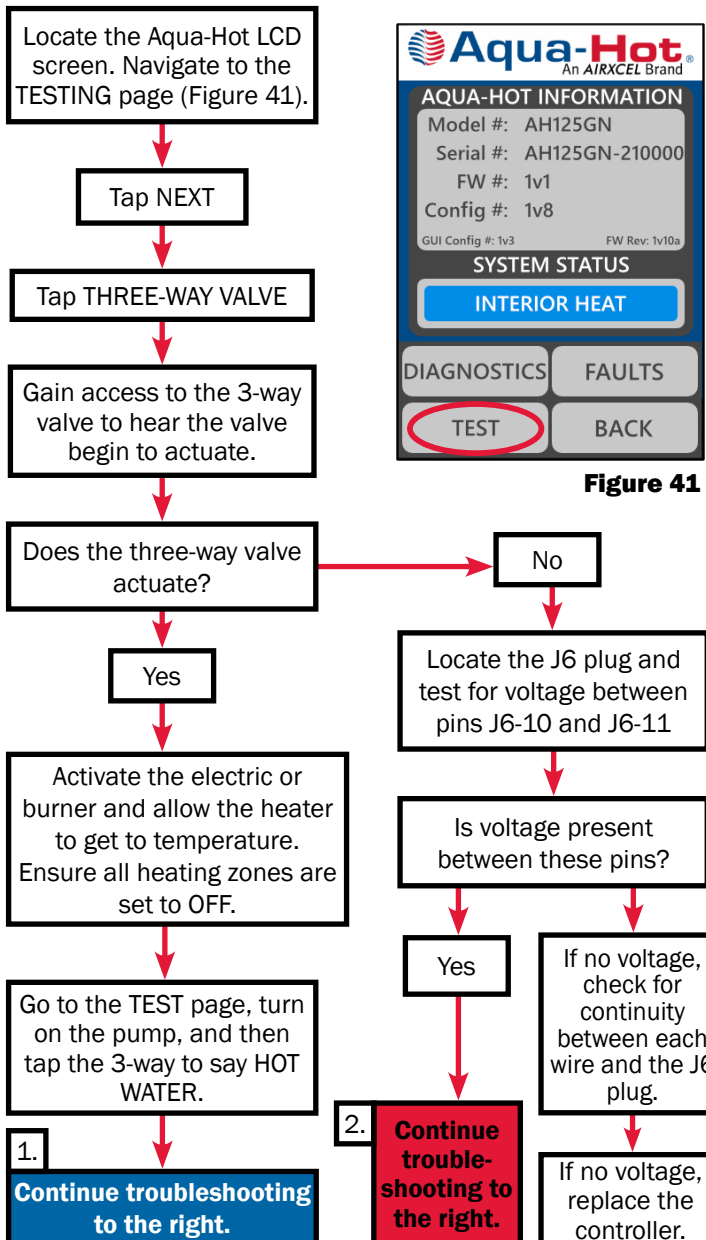

Three-Way Valve

Before replacing the 3-way valve, you must purchase the repair kit. The Repair Kit should include:

- Three-Way Valve
- Black Nylon elbow adapter
- Black Nylon barb adapter
- 2-Pin electrical connector

Replacement Procedure:

1. Drain coolant from system.
 - Pour into a bucket to be reused later.
2. Locate the Three-Way Valve. Clamp off the hoses at the three-way valve:

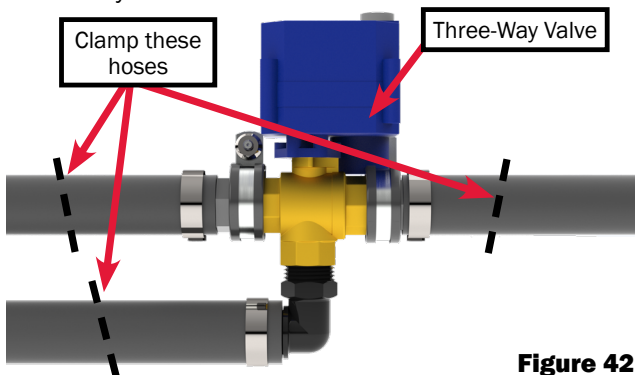


Figure 42

3. Disconnect the electrical connection from the Three-Way Valve to the DC harness.
4. Loosen the hose clamps from the three-way valve.

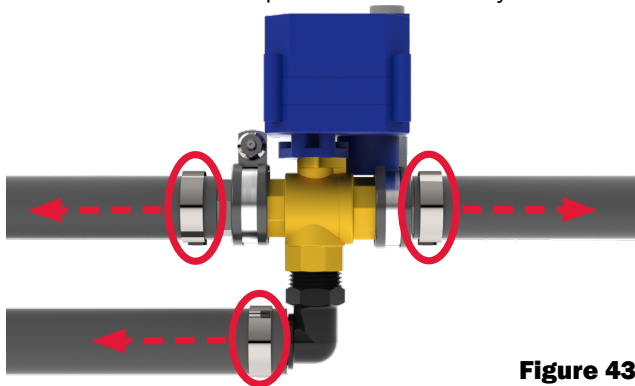


Figure 43

5. Remove the hoses from the barb fittings and then remove the defective three-way valve.
6. Install the new three-way valve and then reinstall the hoses on the new valve. Ensure that the orientation of the valve remains the same.
7. Tighten the hose clamps and reconnect the wire harness to the valve
8. Refill the unit with the coolant saved from Step 1.
 - Add more coolant if needed.
 - Monitor the newly installed parts and fittings for leaks.

Plate-to-Plate Heat Exchanger

Introduction:

The only issue the plate-to-plate heat exchanger may have is leaking or incorrect plumbing.

Check the plate-to-plate exchanger if there is poor hot water performance.

Ensure that the coolant is flowing into the coolant in-port and water is flowing into the water in-port.



Figure 44

Tempering Valve

Introduction:

The tempering valve of the Aqua-Hot mixes the hot domestic water from the Aqua-Hot with cold incoming domestic water to mix it to a threshold where scalding will not occur.



Figure 45

⚠ DANGER

Risk of Severe Burn or Death from Scalds. Water temperature over 51°C (123.8°F) can cause severe burns instantly or death from scalds. See instruction manual before setting temperature at water heater. Feel water before bathing or showering. Temperature limiting valves are available, see manual.

WARNING:
HOT WATER CAN PRODUCE 3RD DEGREE BURNS
- IN 6s at 60°C (140°F)
- IN 30s AT 54°C (129.2°F)
WATER DELIVERY TEMPERATURE MIXING VALVE WAS FACTORY SET AT 49°C (120.2°F).
CONTACT QUALIFIED SERVICE PERSONNEL FOR ADJUSTMENTS.

Risque de brûlures graves ou la mort de brûlures. De l'eau à une température au-dessus de 51 °C (123,8 °F) peut ébouillanter et causer instantanément des brûlures graves allant jusqu'à la mort. Consultez le manuel d'instructions avant de régler la température du chauffe-eau. Vérifiez la température de l'eau avant de prendre un bain ou une douche. Des soupapes de limite de température sont disponibles, voir le manuel.

AVERTISSEMENT:
L'EAU CHAUDE PEUT PRODUIRE DES BRÛLURES DE TROISIÈME DEGRÉ
- EN 6s à 60°C (140°F)
- EN 30s à 54°C (129.2°F)
LA VANNE DE MÉLANGE DE TEMPÉRATURE D'ALIMENTATION EN EAU A ÉTÉ RÉGLÉE EN USINE À 49 °C (120,2 °F).
CONTACTER DU PERSONNEL DE SERVICE QUALIFIÉ POUR LES ADJUSTEMENTS.

LDE-003-260

NOTE: Adjusting the mixing valve beyond 120°F (49°C) will result in a lack of hot water and may result in scalding. Do NOT attempt to adjust the tempering valve without assistance from Aqua-Hot Technical Support or a qualified Aqua-Hot technician.

NOTE: The Aqua-Hot Domestic Water System is rated for a water flow of **0.8 GPM**. It is not recommended to modify the water flow. This can cause a lack of consistent hot water.

Testing Procedure:

Follow the testing procedure to the right in order to diagnose the tempering valve. Troubleshoot the tempering valve if the following conditions have occurred:

- A lack of hot water.
- Hot water supply is uneven.
- Hot water is too hot.

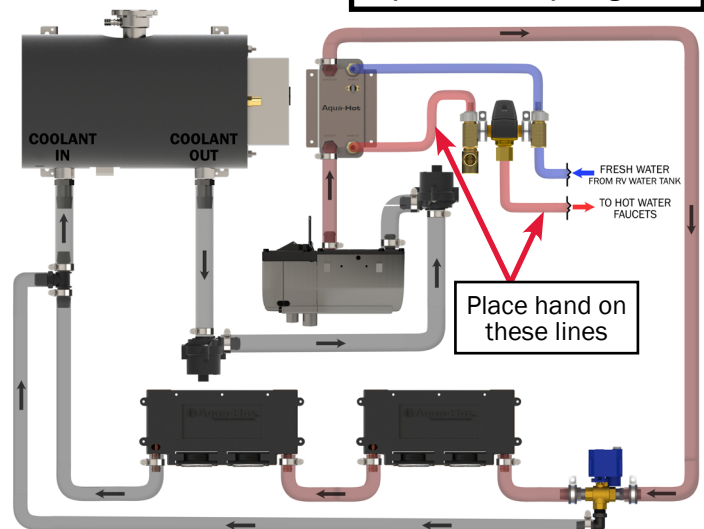
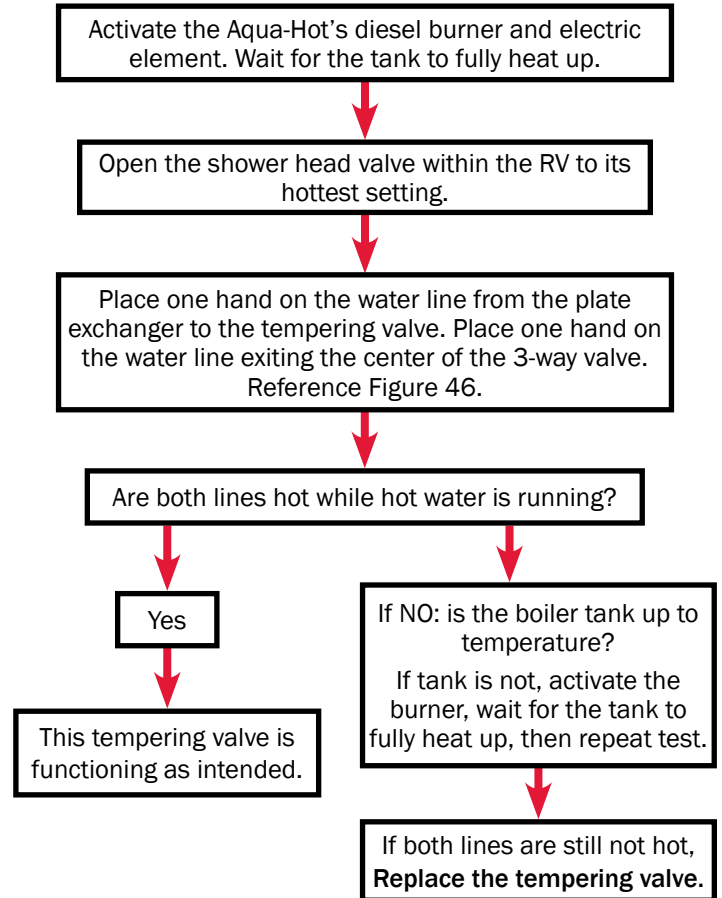


Figure 46

Replacement Procedure:

1. Shut off the external domestic water connection, and open a hot water faucet valve within the RV to relieve the water pressure.
2. Open the RV domestic water drain valve and release water from the system.
3. Disconnect the RV side domestic water connections
4. Locate the tempering valve assembly within the RV.
5. Remove the fasteners that secure the tempering valve assembly.

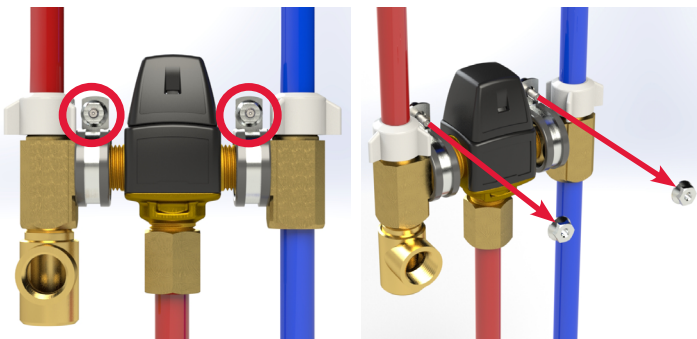


Figure 47

6. Disconnect the water lines from the brass fittings on the tempering valve assembly.
 - There may be residual fluid in the lines. Use clean-up items and tools as needed.

NOTE: This image is a sample for common plumbing. Actual placement/quantity may vary on the individual design of the RV.

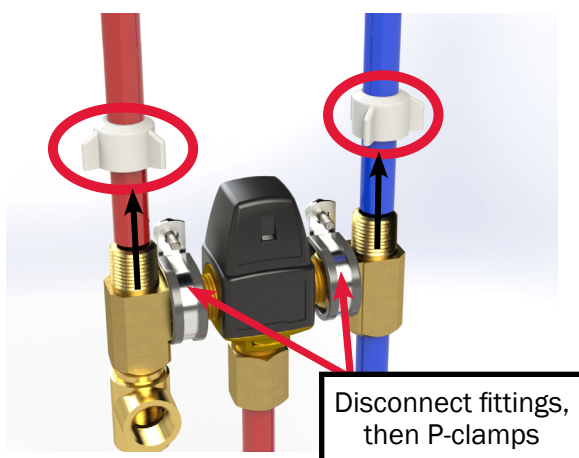


Figure 48

7. Remove all fittings from the tempering valve as shown below.

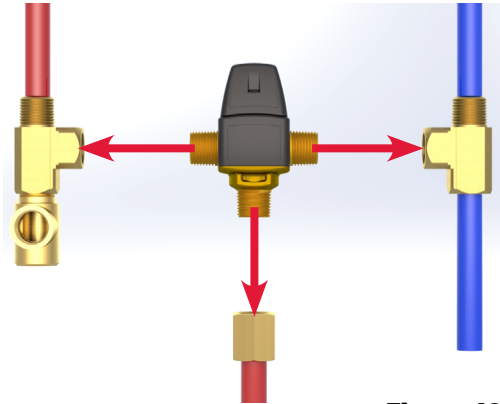


Figure 49

8. Discard the defunct tempering valve.
9. Using Teflon tape and domestic water safe thread sealant, reinstall all fittings on the new valve to previous orientations.
10. Place previous P-clamp onto the assembly before inserting into the Aqua-Hot.
11. Connect the water lines to the tempering valve assembly ensuring they are plumbed to the same place they were removed from.
12. Reusing the fasteners and P-clamps, reattach the tempering valve assembly to the vehicle.

Tank Fluid Circulation Pump

Introduction:

The fluid circulation pump operates to provide fluid circulation to either the interior heating zone or the antifreeze boiler tank depending on the heating and hot water needs at the time.



Figure 50

Troubleshooting Procedure:

If the fluid circulation pump has failed, it will typically indicate an over-current fault on the controller fault log. If this is the case, the fault must be verified before replacing the circulation pump. Follow the procedure to diagnose the fluid circulation pump.

The location of the fluid pump may vary depending on the install. Reference the images below to determine the potential location of the tank pump.

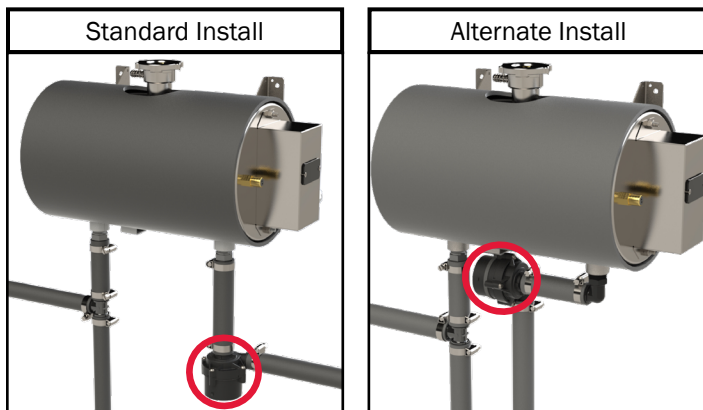


Figure 51

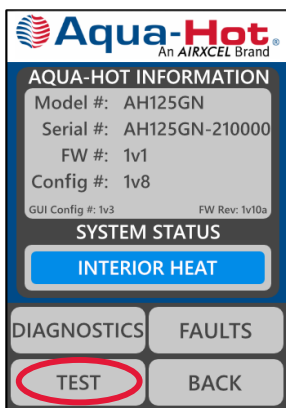


Figure 52a


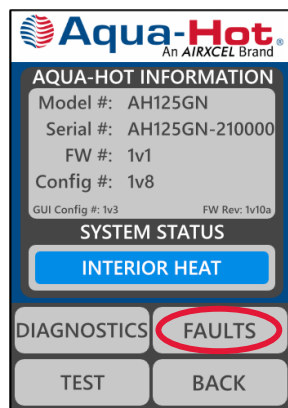


Figure 52b

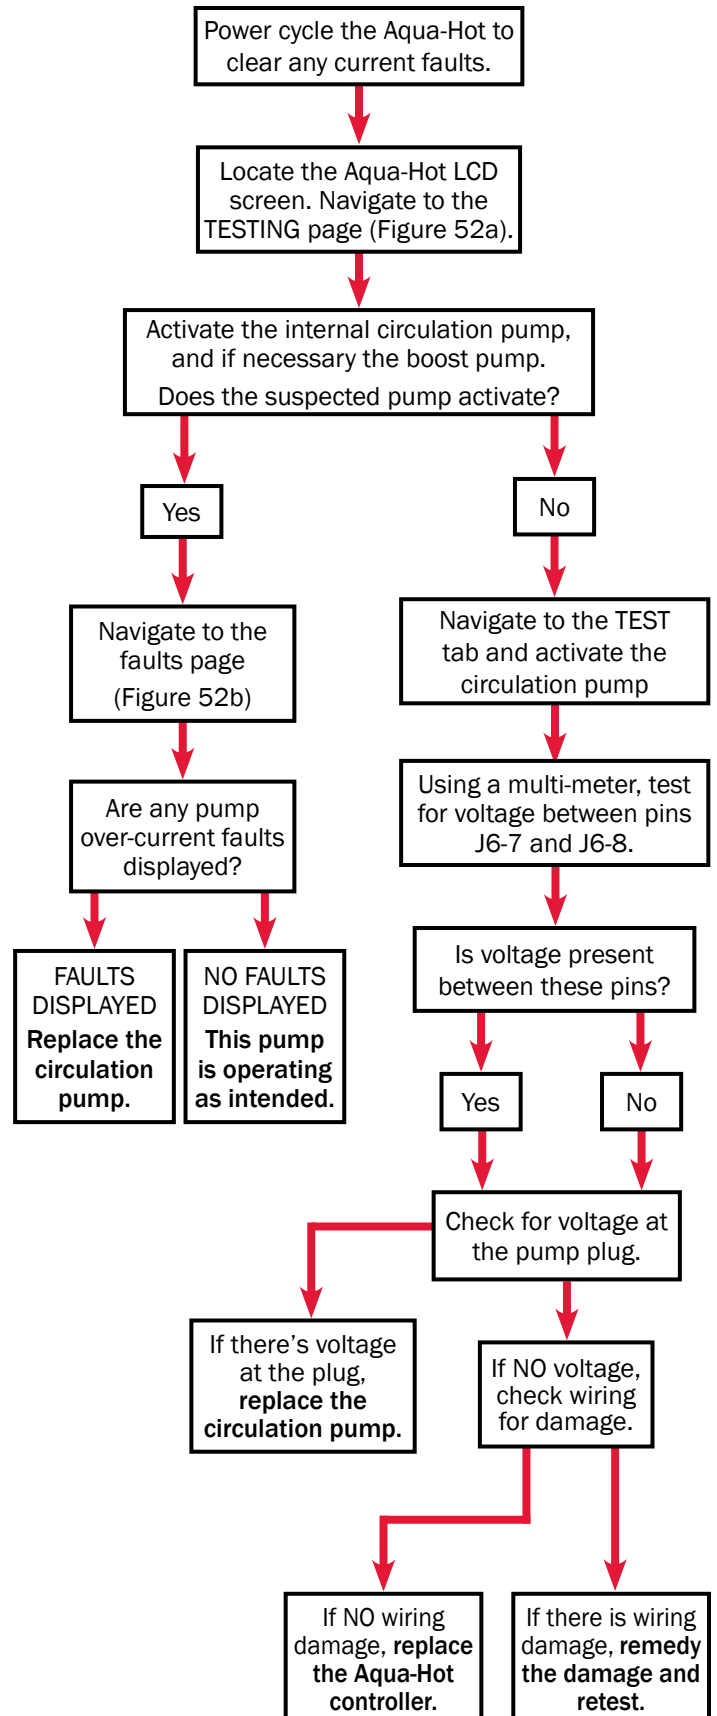

Replacement Procedure:

1. Place a paper towel on the bottom of the cabinet. (This is to help absorb any residual coolant left in the lines upon pump removal.)
2. Drain coolant from the lower tank fitting (see Figure 53). Pour into a bucket to be reused later.
3. Clamp off the hose from the lower tank fitting and the hose leading to the burner pump.
4. Remove electrical plug to the circulation pump and move out of the way.
5. Remove both hose clamps from the barbs of the pump (Figure 54).
6. Carefully remove the hose (leading to the burner pump) from the pump.
7. Carefully remove the pump from the hose attached to the tank and discard it.
8. Insert the new circulation pump and attach it to the hose coming from the tank. Make sure the pump orientation is the same as it was before removing.
9. Attach the hose (leading to the burner pump) to the circulation pump barb.
10. Move both hose clamps onto the barbs of the new circulation pump.
11. Plug the connection from Step 4 into the circulation pump.
12. Refill the unit with the coolant saved in Step 1.
 - Add more coolant if needed.
 - Monitor the newly installed parts and fittings for leaks.

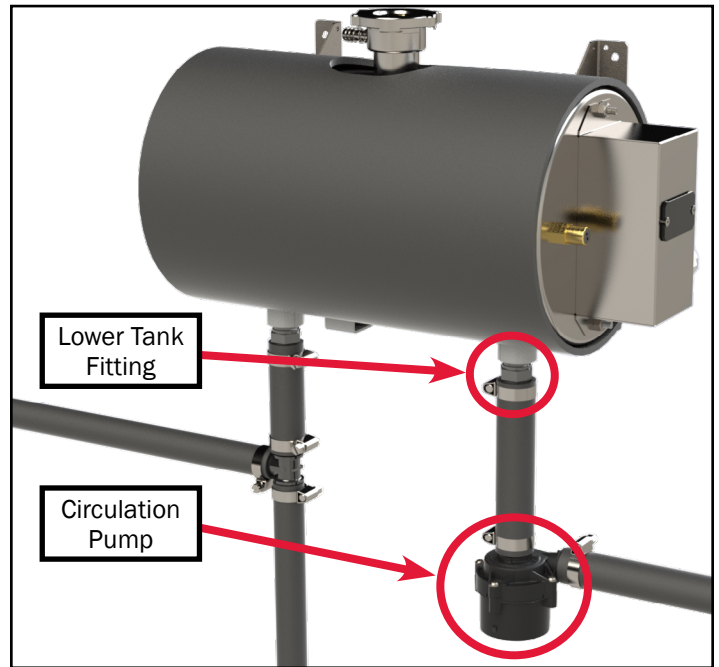


Figure 53

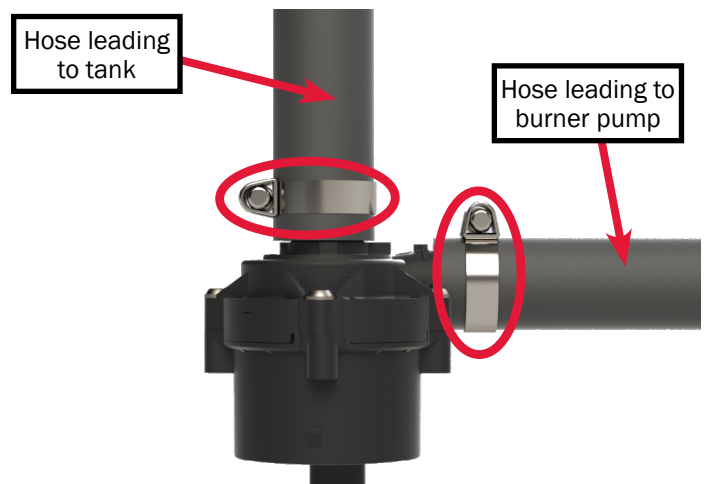


Figure 54

AC Electric System

Introduction:

The AC Electric system of the Aqua-Hot AHM-125D unit functions to provide heat to the Aqua-Hot boiler tank. This is done with an electric element and an electric relay.

Troubleshooting Procedure:

Troubleshoot the AC Electric system if the electric element is not functioning properly.

The following conditions must be met before the AC Electric system can be diagnosed, and if necessary, repaired.

- The boiler tank is adequately filled.
- Verify that all in-line fuses are functional.
- Ensure that the unit is completely cool.
- Ensure that DC electrical power is supplied to the Aqua-Hot.
- Ensure that AC electrical power is supplied to the element.
- Verify the thermostats are in working order.
- Verify there are no faults on the Aqua-Hot LCD.

If any of the above conditions are not met, correct them before continuing with troubleshooting. Results of the troubleshooting procedure cannot be verified if the conditions listed above are not fulfilled.

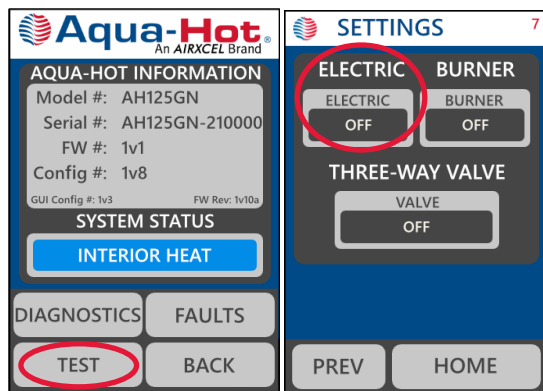


Figure 55


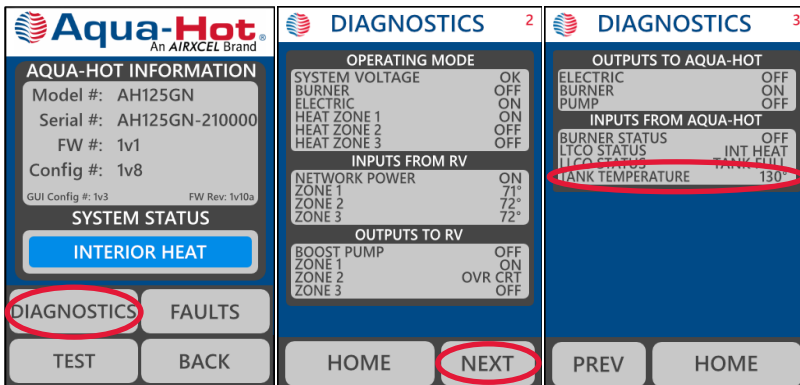


Figure 56

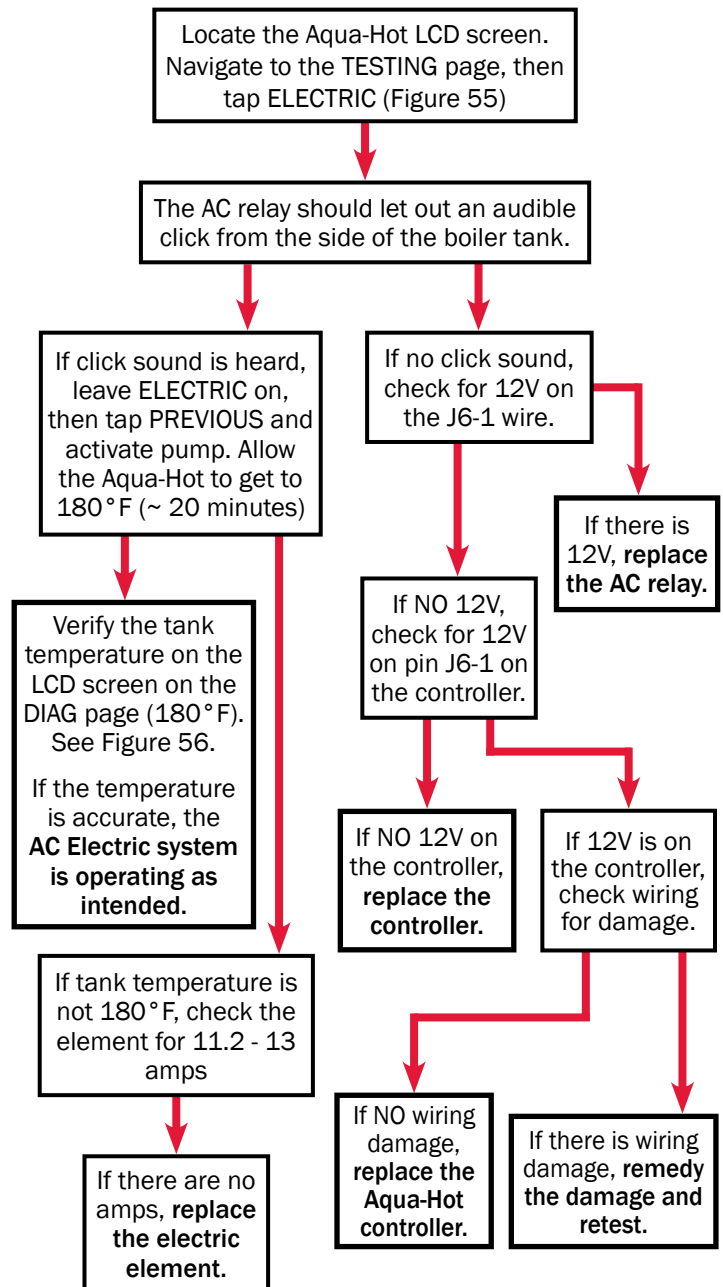

Replacement Procedure:

1. Ensure that the Aqua-Hot has been completely shut down and all power sources have been disconnected. Be sure the boiler tank is completely cooled.
2. Drain the antifreeze and water solution from the Aqua-Hot's boiler tank from the lower tank fitting. Drain the coolant into an external container to be reused.
3. Remove the AC access panel on the Aqua-Hot (Figure 57).
4. Remove the two wires secured to the defective electric heating element by releasing the screw terminals.
5. Using a 1-1/2" (38mm) socket, remove the defective heating element from the Aqua-Hot's boiler tank.
6. Use a healthy amount of Loctite 454 on the threads of the new electric element to ensure that it forms an adequate seal.
7. Install the replacement 1500W electric element into the boiler tank and secure it with the 1-1/2" (38mm) socket.
8. Reconnect the wires previously disconnected from the electric heating element and tighten the screw terminals, then put the AC cover back on.
9. Refill the Aqua-Hot boiler tank with the previously drained fluid, add more 50/50 mix of ethylene glycol and distilled water to the tank if needed.
10. Test for proper operation.

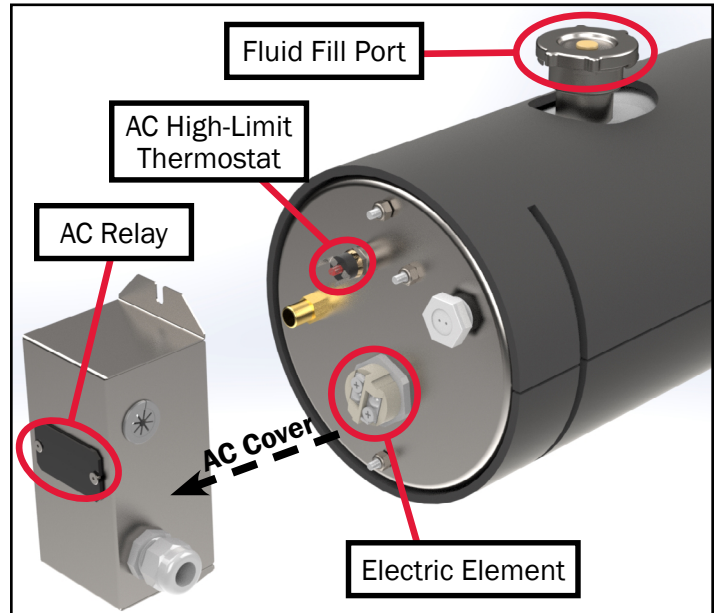


Figure 57

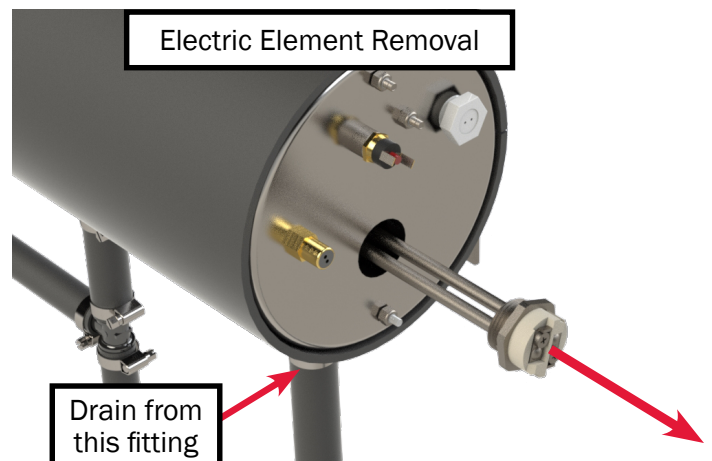


Figure 58

AC Relay

Introduction:

The AC Relay is an electrical device where the DC circuit from the controller determines whether the AC power is permitted to flow to the electric heating element. This allows the controller to switch the electric heating element on and off in conjunction with the interior switch panel and ETS module even though the electric element is on a separate circuit.

Troubleshoot the AC Relay if the electric element fails to operate. This can be verified with a simple test outlined below.

The following conditions must be met before the AC Relay can be diagnosed, and if necessary, repaired.

- The boiler tank is adequately filled.
- Verify that all in-line fuses are functional.
- Ensure that the unit is completely cool.
- Ensure that DC electrical power is supplied to the Aqua-Hot.
- Ensure that AC electrical power is supplied to the Aqua-Hot's electric element.
- Verify the thermostats are in working order.

If any of the above conditions are not met, correct them before continuing with troubleshooting. Results of the troubleshooting procedure cannot be verified if the conditions listed above are not fulfilled.

WARNING

Before continuing the diagnosis, AC power **MUST** be disconnected. Any time the AC cover is removed, the AC power supply must be disconnected to avoid serious injury or damage to the RV or system. To verify that the element is working, the AC power does not need to be connected.

Troubleshooting Procedure:

1. Turn the electric element ON at the LCD screen.
2. Locate the AC wires connected to the AC Relay and remove the wires from the relay.
3. Check for 12V DC on the J6-1 wire.
4. Using an ohmmeter, check the AC relay pins for continuity.
5. If no continuity exists, follow the procedure to replace the AC Relay.

Replacement Procedure:

1. Ensure that the Aqua-Hot has been completely shut down and all power sources have been disconnected. Be sure the boiler tank is completely cooled.
2. Ensure that the RV is not connected to shore power and that a generator is not connected during this procedure.
3. Remove the AC cover panel from the boiler tank.
4. Remove all wires from the relay.
5. Remove the defective relay by drilling the rivets that hold the relay in place (Figure 60) and discard the defective relay.
6. Rivet the replacement AC relay to the previous position.
7. Reconnect the wires previously removed to the replacement AC relay.
8. Reinstall the AC cover panel and test for proper operation.

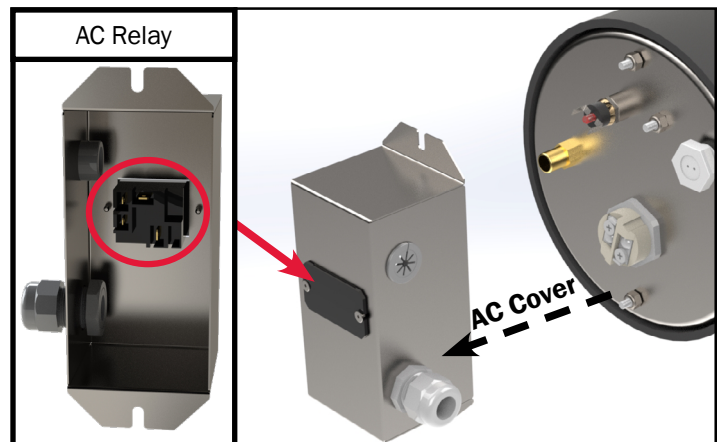


Figure 59

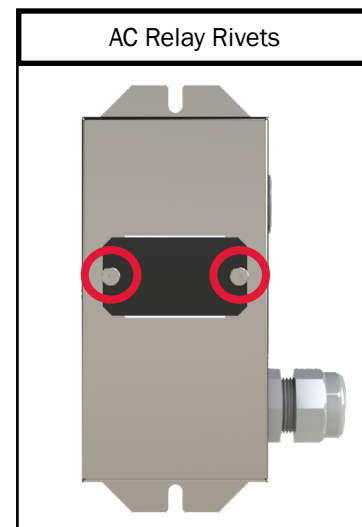


Figure 60

ETS Module

Introduction:

The ETS (Engine Temperature Sensor) Module is a brass thermistor that continually measures the temperature of the fluid within the Aqua-Hot boiler tank. This module then relays the information to the Aqua-Hot controller, thereby allowing the controller to activate and deactivate the unit as heating and hot water needs change.

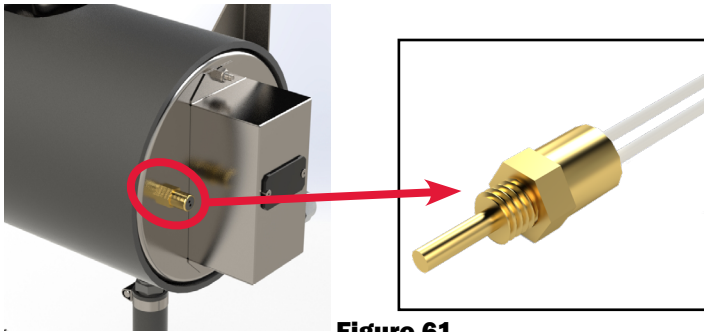


Figure 61

Troubleshooting Procedure:

Troubleshooting the ETS module is a relatively straight forward process. Follow the instructions below to diagnose the ETS module. Troubleshoot the ETS module if the following conditions have occurred:

- A lack of hot water.
- A lack of interior heat.
- The Aqua-Hot is not operating.

Verify the following before proceeding with the troubleshooting:

- The boiler tank is adequately filled.
- Ensure that DC electrical power is supplied to the Aqua-Hot.
- Ensure that AC electrical power is supplied to the Aqua-Hot's electric element.
- The high-limit thermostat is not tripped.
- All fuses are in working order.

If any of the above conditions are not met, correct them before continuing with troubleshooting. Results of the troubleshooting procedure cannot be verified if the conditions listed above are not fulfilled.

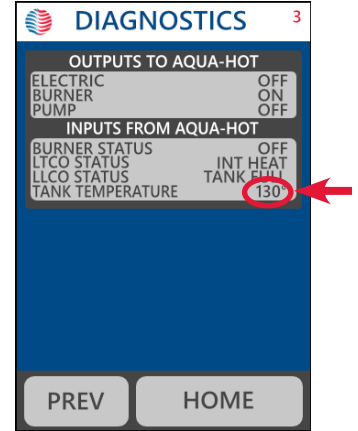
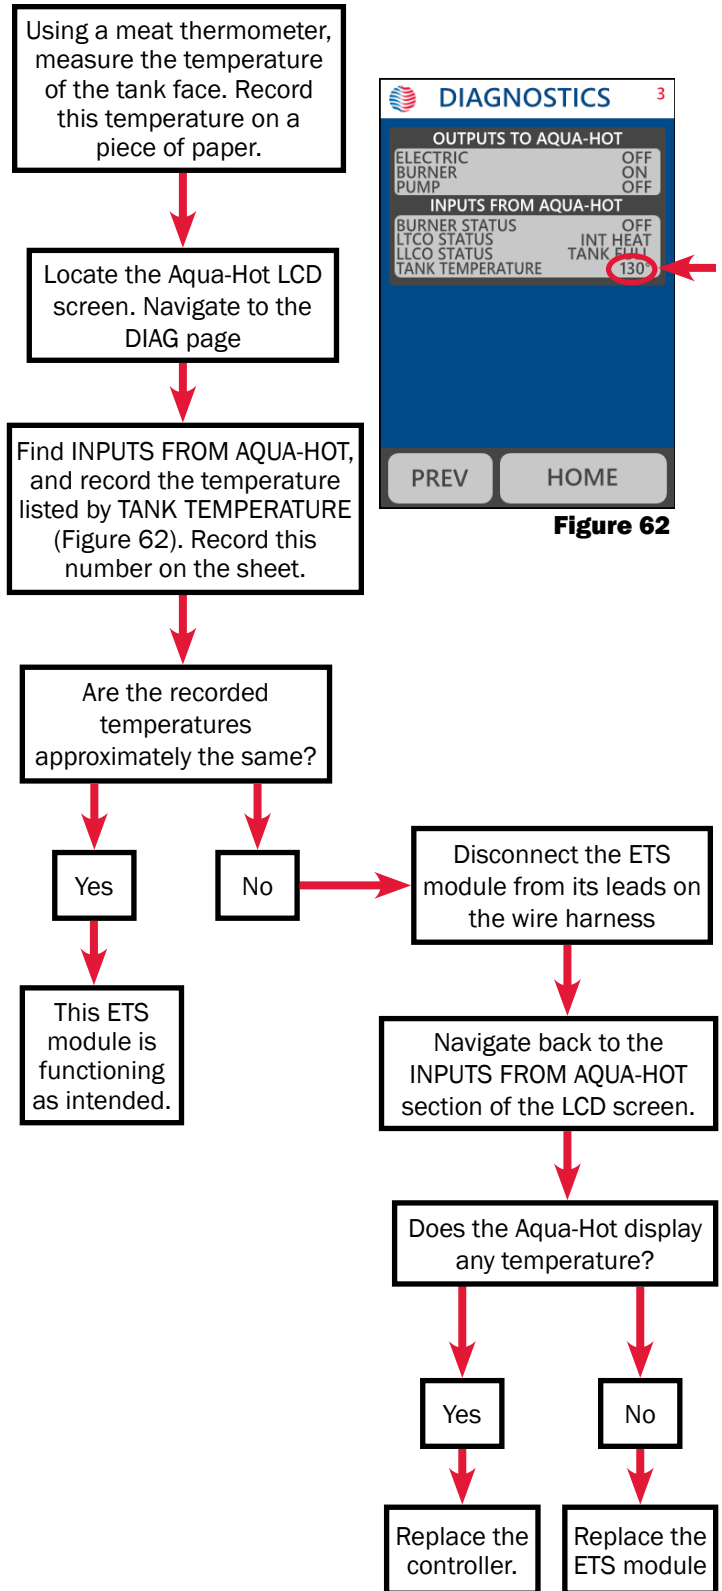


Figure 62

Replacement Procedure:

If the ETS Module has been diagnosed and a replacement must be made, follow the instructions below.

1. Drain the unit by pinching off the lower tank fitting hose (shown below) with pinch off pliers, and removing the hose.
2. Allow the fluid to drain into an external bucket or container to be reused later.
3. After approximately 1.5 gallons has drained from the unit, reinstall the hose to stop the flow of coolant.
4. Disconnect wires from the ETS Module.
5. Using a 14mm wrench or deep socket, remove the defunct ETS module from the tank face and discard it.
6. Place the replacement ETS module in its position on the tank face, and finger tighten it into place.
7. Using the 14mm wrench, tighten the module until it is snug in place.
8. Reconnect the disconnected wires from the harness.
9. Reconnect the lower tank fitting hose to the tank and remove the hose clamp.
10. Pour the previously removed fluid back into the tank and allow it to fill the system.
11. Once this has been completed, locate the Aqua-Hot LCD screen, navigate to the test section, and run the fluid circulation pump (and if applicable the boost pump) for at least twenty minutes to purge the heating loop of air.

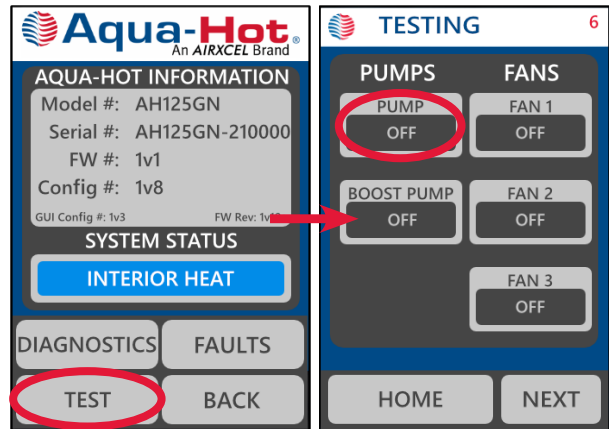


Figure 64

12. Continually fill the tank as the fluid level drops.
13. Test the Aqua-Hot for normal operation.

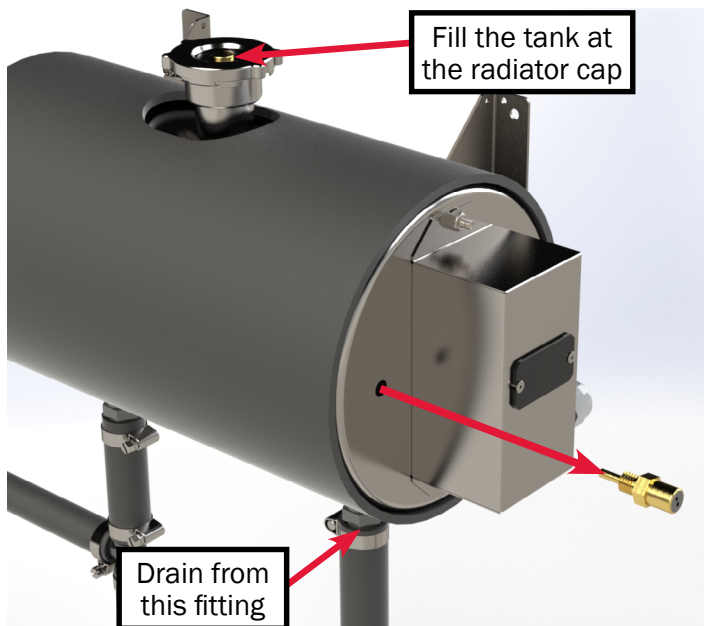


Figure 63

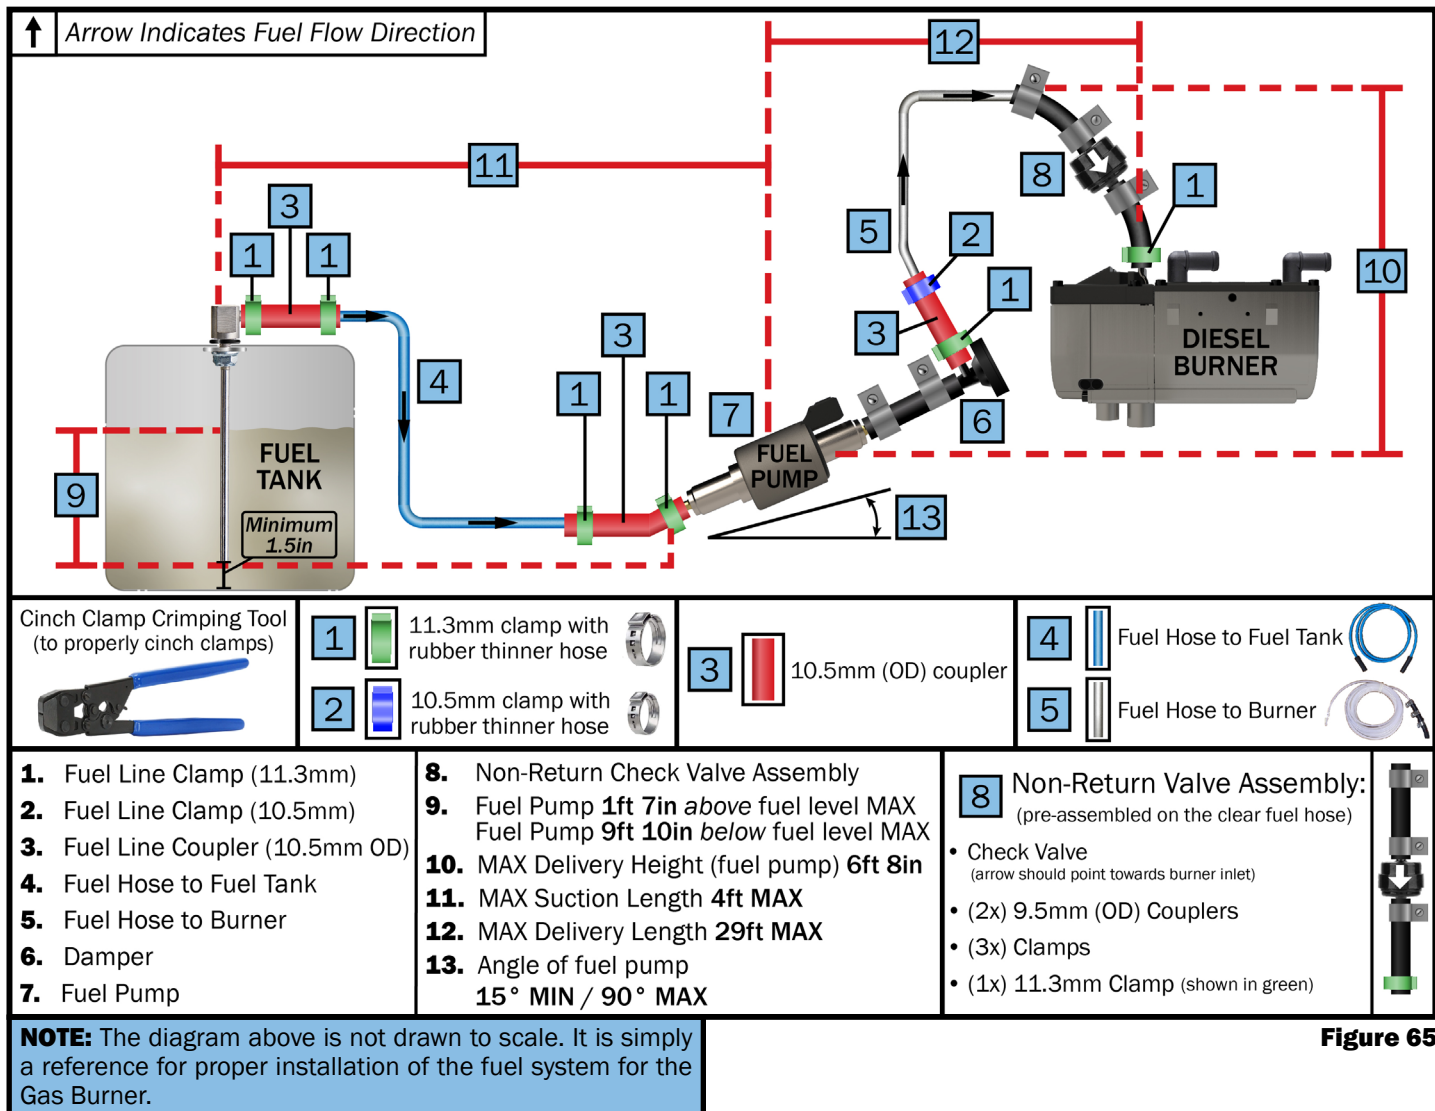


Figure 65

Fuel System Plumbing

- Ensure the fuel system meets the requirements detailed in Figure 65.
- Ensure no connections leak. Any leaking connections will lead to burner problems.
- Where possible, the fuel line should have a gentle incline from the fuel tank to the burner.
- Fuel line should be installed as flatly as possible, avoiding sharp rises and falls.
- Route fuel lines away from any hot components and separate from electrical wires.
- Prevent abrasion and vibration along the length of the fuel line.

Fuel Pump

- The fuel pump is a combined pumping, metering, and shut-off system. It pumps fuel from the vehicle supply to the burner via the fuel lines.
- The outlet of the fuel pump is required to be installed upwards. The angle should be between 15°-35°. See Figure 67 for fuel pump orientation.

Fuel System Replacement:

1. Replace any defective part.
2. Check fuel lines and connections for damage.
3. Replace as necessary. See the diagram above and Pages 37-39 for further instructions.

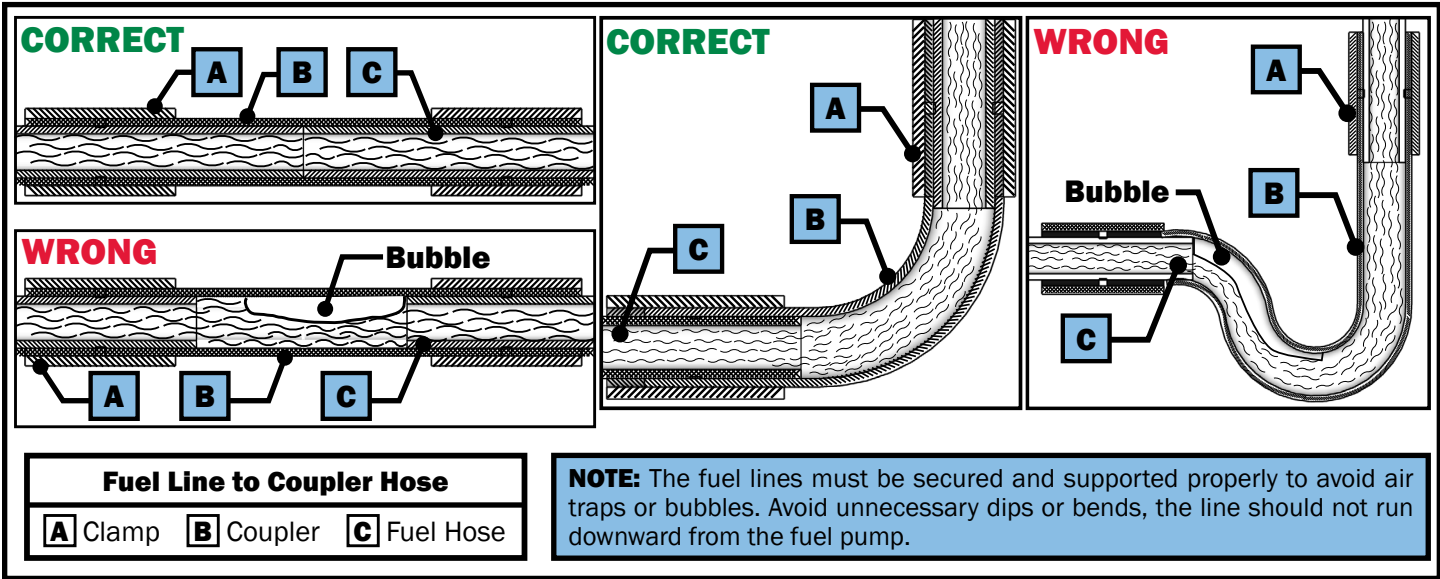


Figure 66

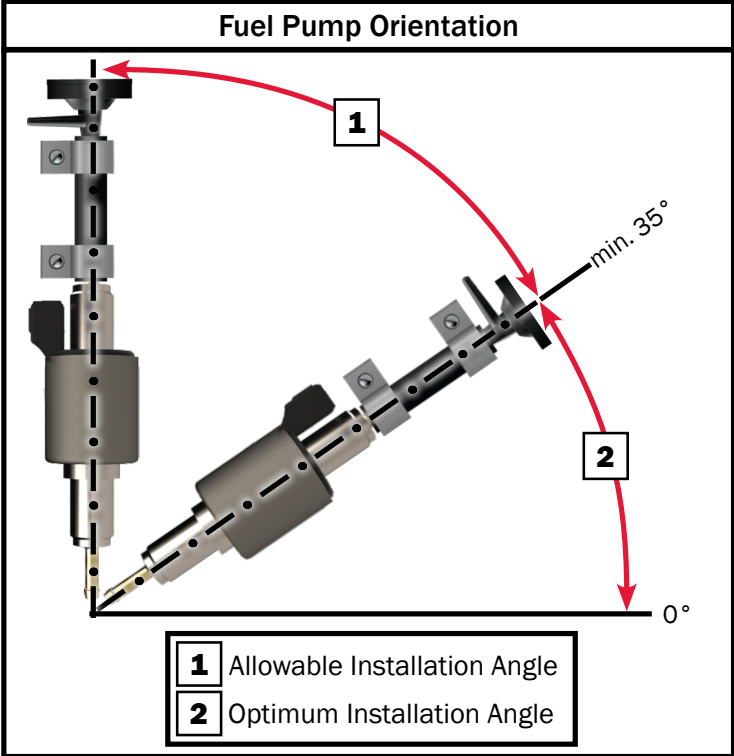


Figure 67

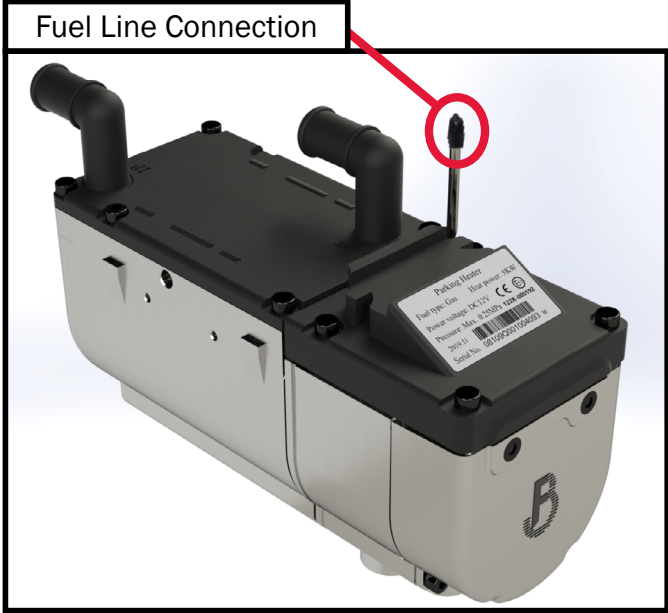


Figure 68

NOTE: The Fuel System requires that the gasoline used (in the vehicle for the burner supply) must be 87 octane or greater (87, 89, 91, or 93 octane).

! WARNING

Please follow instructions to ensure safe operation. Always check for any fuel leaks before operating the burner.

DANGER

GAS

Fuel System Fill Procedure

Perform this procedure once the burner and Aqua-Hot are completely installed and the Aqua-Hot is adequately filled and purged.

- Ensure all fuel system connections have been made.
 - Ensure all fuel line clamps are tight.
 - The fuel level in the vehicle's tank must be above the fuel pickup level.
 - Provide adequate ventilation to prevent buildup of dangerous exhaust gases in the workspace.
4. Repeat steps 1-3 until fuel reaches the burner. A rumble from the burner will be heard and the exhaust temperature will increase when the burner has ignited.
 5. Tap the burner switch to "OFF"

Fill Instructions

1. At the LCD screen tap the burner switch to "ON".



Figure 69

2. Listen for the fuel pump to start tapping. The pump will begin priming the fuel system.
3. If the burner does not receive fuel in time a fault will be displayed on the LCD screen. Tap the fault icon.
 - If "Burner: Failed to Ignite" is displayed tap "RESET". Follow the prompts to clear the fault. Wait approximately 30 seconds for the fault to fully clear before proceeding.

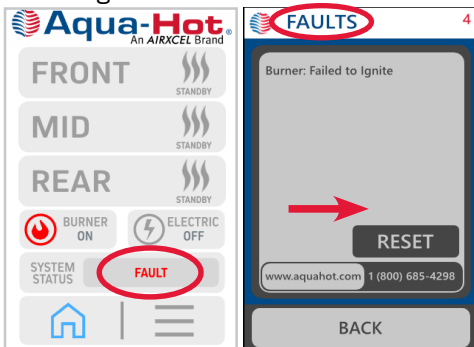


Figure 70




Figure 71

NOTE: Once the fuel lines are primed, the fault should clear, but the fault may need to be reset in the process. Just press the RESET button (Figure 72) to clear all the faults.




Figure 72

- If a different fault is displayed, follow the troubleshooting guide on page 49 and address the cause of the fault.

External Gas Burner Troubleshooting

The troubleshooting procedures listed below are arranged in order of repair complexity. Do not replace parts without correctly determining the failure. Follow the directions below in order to troubleshoot the gas burner. Do not skip through the troubleshooting steps, as this may needlessly complicate unit diagnosis and repair.

Troubleshooting Procedure:

- Ensure that the system is supplied with electrical power and there are no blown fuses.
- Ensure that there is at least ¼ tank of fuel in the vehicle fuel supply.
- Make sure all the electrical and plumbing connections are connected and secure.
- Ensure there are no faults for the burner. If there are, determine the fault and remedy.

The fault is indicated on the home screen by the Burner Status ON/OFF indicator as shown below. When the burner is turned ON, the LCD screen will show STATUS as “FAULT”. Tapping on FAULT will take you to the FAULTS screen which will display “Burner: Failed to Ignite”. After about a minute, the fault screen will show the specific fault code. Refer to the table on the next page for the fault codes and their remedies.

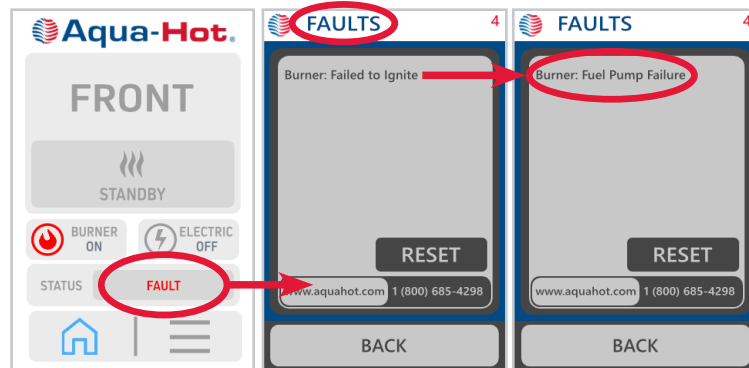


Figure 73

Triggering Overheating Fault:

If there is an overheat fault, the overheat failure is generally caused by the temperature in the Aqua-Hot.

A lack of antifreeze/distilled water solution may cause overheating failures, because the Aqua-Hot temperature cannot be carried away by the antifreeze/distilled water solution.

If the antifreeze/distilled water solution is sufficient and well-circulated, there will be no overheating failure as long as the antifreeze/distilled water solution does not exceed 203°F.

NOTE: After the fault cause has been eliminated, the burner must be switched on again.

Heater Lock-out Reset Procedure

The control unit continuously monitors the heater operation. The control unit identifies errors on individual burner components and faults during operation. Should the control unit experience component errors and operational faults, the burner may be shut down and not restart.

The burner lockout reset must be done manually as shown below.

Troubleshooting Procedure:

- Turn on the burner, on the interior control panel.
- Remove the main power connection to the burner or pull the fuse for a minimum of 20 seconds.
- Turn the burner off on the interior control panel.
- Reconnect the main power connection that was previously disconnected.

External Gas Burner Faults & Remedies

Fault Code	Fault Cause	Remedy	Fault Code	Fault Cause	Remedy
10	Burner: Voltage too high (exceeds 16V)	<ul style="list-style-type: none"> Check power supply 	51	Burner: Failed to Ignite Combustion chamber temperature is too high prior to ignition	<ul style="list-style-type: none"> Wait for flame sensor cooling Replace flame sensor (normal resistance about 10K Ω)
11	Burner: Voltage too low (lower than 10.5V)	<ul style="list-style-type: none"> Check power supply / battery voltage 			
12	Burner : Overheat (> 228.2° F)	<ul style="list-style-type: none"> Check coolant level, refill coolant if low after the heater cools down, restart 			
13	Burner: Failed to Ignite				
14	Burner: Over-Temp Coolant Overheat	<ul style="list-style-type: none"> Check the circulation pump to see if working properly 	52	Burner: Flame-out 3 times	<ul style="list-style-type: none"> Check whether fuel pipe is blocked or fuel tank is low Check whether air inlet pipe or exhaust pipe is blocked
17	Burner: Over-Temp - Hardware (> 233.6° F)	<ul style="list-style-type: none"> Ensure there are no air bubbles in the coolant system. 			
13	Burner: Failed to Ignite Second failure (burner failed to ignite 2 times)	<ul style="list-style-type: none"> Check whether fuel pipe is blocked or fuel tank is low Check whether air inlet pipe or exhaust pipe is blocked 	60	Burner: Temperature sensor absent/broken circuit	<ul style="list-style-type: none"> Check temperature sensor (normal temperature resistance about 10 Ω) Replace temperature sensor
			61	Burner: Temperature sensor short-circuit	
			62	Burner: Coolant temperature is too high prior to ignition	
20	Burner: Heat Plug Failure Absent/broken circuit	<ul style="list-style-type: none"> Clean up carbon deposits Replace glow plug Replace controller 	64	Burner: Flame sensor absent/broken circuit	<ul style="list-style-type: none"> Check flame sensor (normal temperature resistance about 0.8 Ω) Replace flame sensor
21	Burner: Heat Plug Failure Short Circuit		65	Burner: Flame sensor short-circuit	
22	Burner: Heat Plug Failure Poor/Reduced Performance		71	Burner: Overheat sensor absent/broken circuit	<ul style="list-style-type: none"> Check overheat sensor and wiring Replace overheat sensor Replace controller
23	Burner: Heat Plug Failure Heat Plug Voltage not detected		72	Burner: Overheat sensor short-circuit	
30	Burner: Fan Speed too high		<ul style="list-style-type: none"> Replace burner controller 	84	Burner: Fan speed has not been detected
31	Burner: Fan absent/broken circuit	<ul style="list-style-type: none"> Check if fan wheel is binding Replace fan motor assembly Replace Controller 			
32	Burner: Fan has short-circuited				
33	Burner: Fan Speed too low	<ul style="list-style-type: none"> Check power voltage Check if fan wheel is binding Replace burner controller 	Burner: Communication Failure		
			91	Burner: Crystal failed in the controller (crystal oscillator is the "heartbeat generator")	<ul style="list-style-type: none"> Check burner harness & connections Ensure terminals are making contact and wires are in place Replace burner harness or burner connector if damage is found Replace controller
99	Burner: Fault information invalid				
41	Burner: Circulation pump absent/broken circuit	<ul style="list-style-type: none"> Check pump wiring Replace circulation pump 	E0	Burner: Signal at start-up was not detected	
42	Burner: Circulation pump short circuit				
47	Burner: Fuel Pump Failure Fuel pump short-circuit	<ul style="list-style-type: none"> Check fuel pump wiring/connections 	E1	Burner: Controller fault	
48	Burner: Fuel Pump Failure Fuel pump absent/broken circuit	<ul style="list-style-type: none"> Replace fuel pump Replace controller 	E2	Burner: Glow Plug measurement circuit fault	

General Failure Symptoms of the Burner

This section will cover the typical failures of the gas burner. Refer to the table more fails and their remedies.

Failure Symptom	Possible Cause	Remedy
Burner switches off automatically (fault lockout)	No combustion after start or automatic repeat start	Switch off burner and switch back on.
	Flame extinguishes during operation	<ul style="list-style-type: none"> Check coolant lines for obstructions, closed valves, and kinks. Check coolant level, purge any air. Allow burner to cool down. Check for failure codes.
	Burner overheats	<ul style="list-style-type: none"> Charge/replace batteries. Switch off burner and switch back on.
Heater is letting out black smoke from the exhaust	Combustion air and/or exhaust tube is blocked	Check combustion air intake and or/ exhaust tube.
Burner does not switch on	Heater is without electrical power	Check power supply to the unit and ground connections.
Burner switches off during operation (= fault lock-out)	Burner has overheated due to lack of coolant	Refill antifreeze and water mixture.

Service of the Burner

The service or maintenance should be done once a year to maintain the functional reliability of the burner. The service and any repairs must only be performed by trained technicians.

Proper preventive maintenance greatly improves the burner performance.

- Visual inspection of the burner for any external damage, fastening, and also external cleaning (make sure power is disconnected before any cleaning).
- Inspect electrical connections for corrosion, making sure they are all properly secured and free of any kinks, cracks, or damage.
- Check the exhaust and combustion air lines for signs of damage and make sure they are clear of debris or any blockages.
- Check fuel lines for any leaks, kinks, cracks, or damage.
- Check plumbing lines and circulation pump to make sure they are properly secured and free of any damage.
- Check the fuel pump and circulation pump for any damage.
- Run the burner for 20 minutes once a month.
- Clean the burner of any debris or dust with compressed air.



Figure 74

Burner Operation after Service

The first operation of the burner (after service or maintenance) with the Aqua-Hot may not light up perfectly. It may take 5-6 starts for the burner to ignite for the first start-up after service, because the fuel pump needs to fill the fuel lines leading to the burner for ignition. This is normal and may take a couple tries to get the fuel lines purged of air before a successful start-up.

NOTE: Make sure to perform the fuel line purge procedure on Page 38 prior to starting this initial start up of the burner.

Activation Instructions (Burner):

1. Place a bucket under the tank overflow tube. As the tank heats for the first time after filling, any excess coolant will be vented through the overflow tube.
2. At the LCD screen, tap the burner switch to "ON".




Figure 75

3. Listen for burner ignition, it can take around 1 minute to ignite.
4. Tap the three lines icon -> Diagnostics -> Diagnostics -> Next

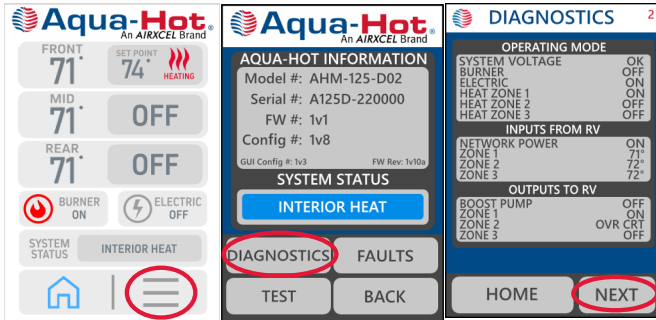


Figure 76

5. Locate the "Tank Thermistor" field




Figure 77

WARNING

Failure to follow instructions on the fuel delivery system can cause damage to the Aqua-Hot AHM-125G, the gas burner, or the RV. It may cause serious personal injury. Please follow instructions carefully.

6. Watch for the "Tank Thermistor" temperature to increase 2 to 3 degrees.
 - If no temperature increase is seen diagnose the burner following the service manual.
7. Allow the burner to heat the tank to full temperature (180°F).
8. Tap the Home icon -> Back -> Burner to OFF.

NOTE: It is recommended to run the burner for at least 20 minutes every month to ensure optimum heater condition.

NOTE: Both the electric heating element and the external gas burner are thermostatically controlled. The element and/or burner will automatically maintain the temperature of the boiler tank's antifreeze and water heating solution.

WARNING

Burn Hazard

Hot Coolant Circuit with Hot Surfaces can cause severe burns.

DO NOT touch or service until equipment has cooled.

LDE-200-810

Lack of Interior Heat or Hot Water

A lack of interior heat or hot water when provided with adequate heat from either the electric element and/or the gas burner can be attributed to an overheat thermostat, the Aqua-Hot controller, the three-way valve, or the fluid circulation pump.

Follow the directions below in order to troubleshoot the Aqua-Hot. Do not skip through the troubleshooting steps, as this may needlessly complicate unit diagnosis and repair.

1. Verify that the Aqua-Hot is supplied with electrical power.
2. Make sure there is an adequate supply of gasoline (at least $\frac{1}{4}$ tank).
3. Ensure that the Aqua-Hot boiler tank has an adequate supply of antifreeze and water heating solution by checking the level at the boiler tank. If the level is low, reference the maintenance section of this guide for refilling instructions.

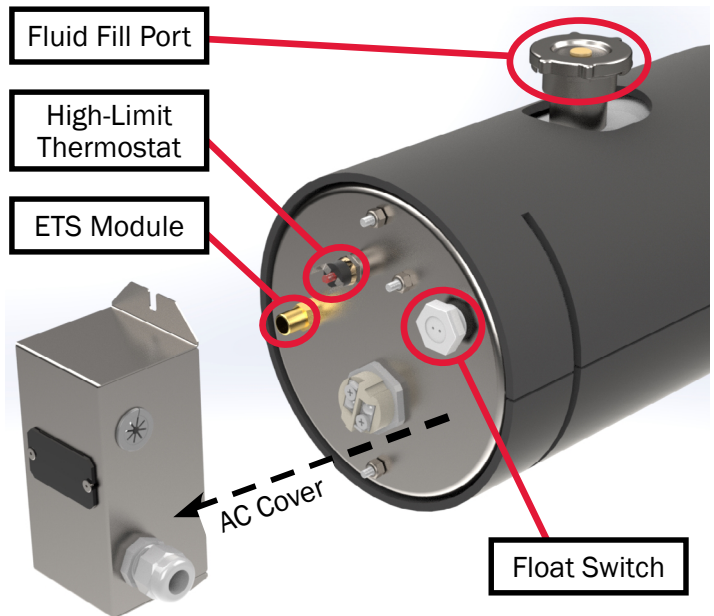


Figure 78

NOTE: The float switch is located on the Aqua-Hot's boiler tank, as shown above. If the antifreeze solution in the tank drops below the level of the float switch, the Aqua-Hot will not operate.



DANGER

The system should **NOT** be checked when the fluid is warm - the M125 is a pressurized system and cause personal injury.

4. Verify the functionality of any in-line fuses connected to the Aqua-Hot. Replace these fuses if necessary.
5. Ensure that all RV-side hot water faucets are closed.
6. Visually inspect the interior of the Aqua-Hot to ensure that there are not any pinched or damaged wires.
7. Locate the high-limit thermostat within the Aqua-Hot (see Figure 78). Test the thermostat for functionality, and replace if necessary.
8. Locate and test the ETS module (Figure 78) for functionality. Replace if necessary.
9. Locate and test the fluid circulation pump. Replace if necessary.
10. Locate the three-way valve and test it for functionality. Replace if necessary.
11. Make sure there are no faults displayed on the LCD screen as shown to the right.

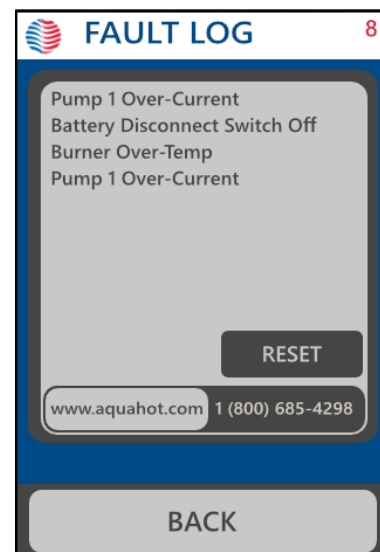


Figure 79

Winterizing the Aqua-Hot

The Aqua-Hot's domestic water heating system must be completely drained of domestic water at any time the heater is stored where freezing temperatures may be experienced.

Please follow these instructions when winterizing the Aqua-Hot domestic water heating system.

NOTE: The Aqua-Hot can continue to be used for interior heat once the domestic hot water system has been winterized.

1. Completely drain the fresh water storage tank.
2. Disconnect the domestic water demand pump suction line from the fresh water storage tank.
3. Attach an adequate piece of hose onto the suction side of the domestic water demand pump.
4. Place the opposite end of the hose into an adequate supply of non-toxic RV winterization antifreeze (FDA certified as "GRAS" Generally Recognized As Safe must be used) and allow the fluid to pump through.
5. Open and close all interior and exterior water faucets one at a time, until ONLY pure RV antifreeze is present. Perform this procedure for both cold and hot water faucets.
6. Remove the hose and reconnect the domestic water demand pump's suction line to the fresh water storage tank.



WARNING

Not winterizing the Aqua-Hot when freezing temperatures are present will result in serious damage to the Aqua-Hot domestic water heating system. Ensure that only non-toxic RV antifreeze (FDA approved "GRAS" antifreeze) rated for winterization is used when winterizing this unit. The warranty does not cover freeze damage.

NOTICE


Disinfecting the Domestic Water System

The Aqua-Hot Heating components are not compatible to prolonged exposure to sodium hypochlorite (bleach or liquid bleach). Using products containing bleach, including water refreshers, may cause corrosion of the domestic water lines, resulting in a catastrophic failure of the Aqua-Hot system by creating leaks that cannot be repaired. This damage is not covered by the Aqua-Hot warranty.



If disinfecting the hot water system, be sure to follow NFPA 1192 Standard of Recreational Vehicles "Instructions for Disinfection of Potable Water Systems" or any other applicable local standards for Potable Water Systems.


NOTE: Extended exposure to household bleach will corrode the components of the Aqua-Hot will potentially dramatically shorten the operational lifetime of the Aqua-Hot. Under no circumstances is the Aqua-Hot to be exposed to household bleach for extended periods of time.

NOTE: All connectors are shown from Pin insertion side.

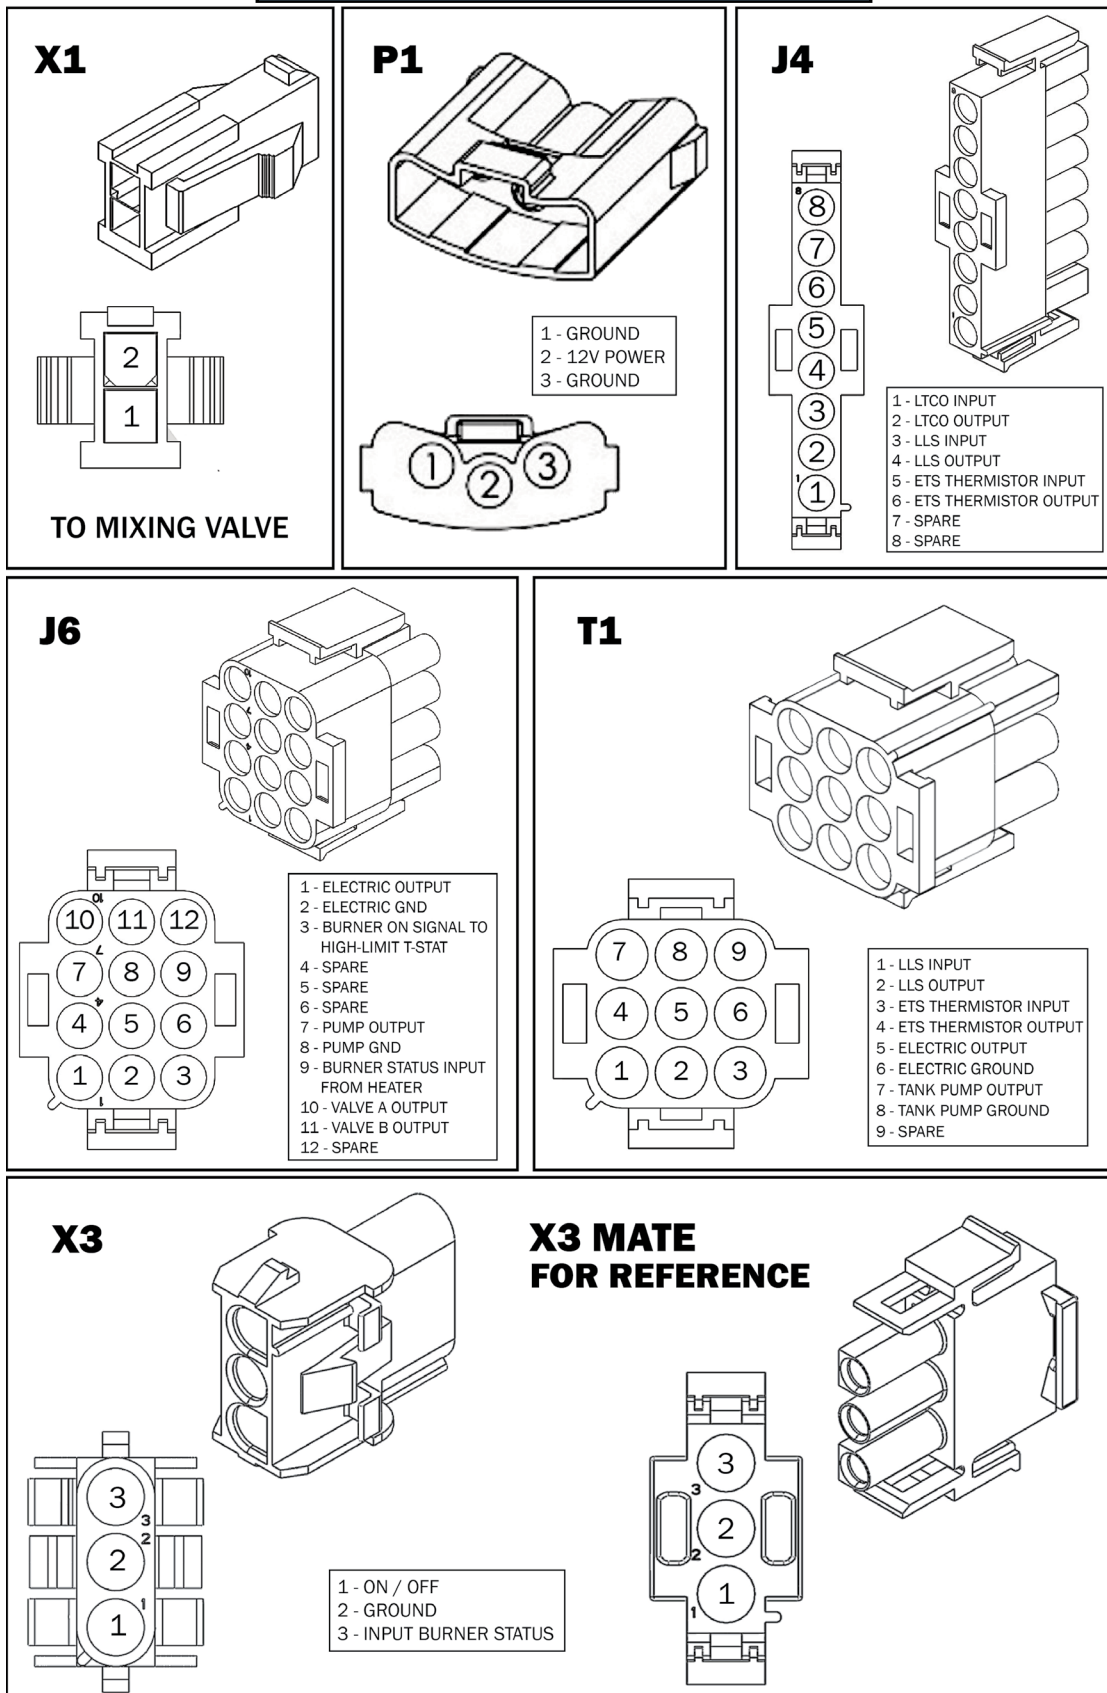


ZONE HEAT EXCHANGERS & ZONE THERMOSTATS

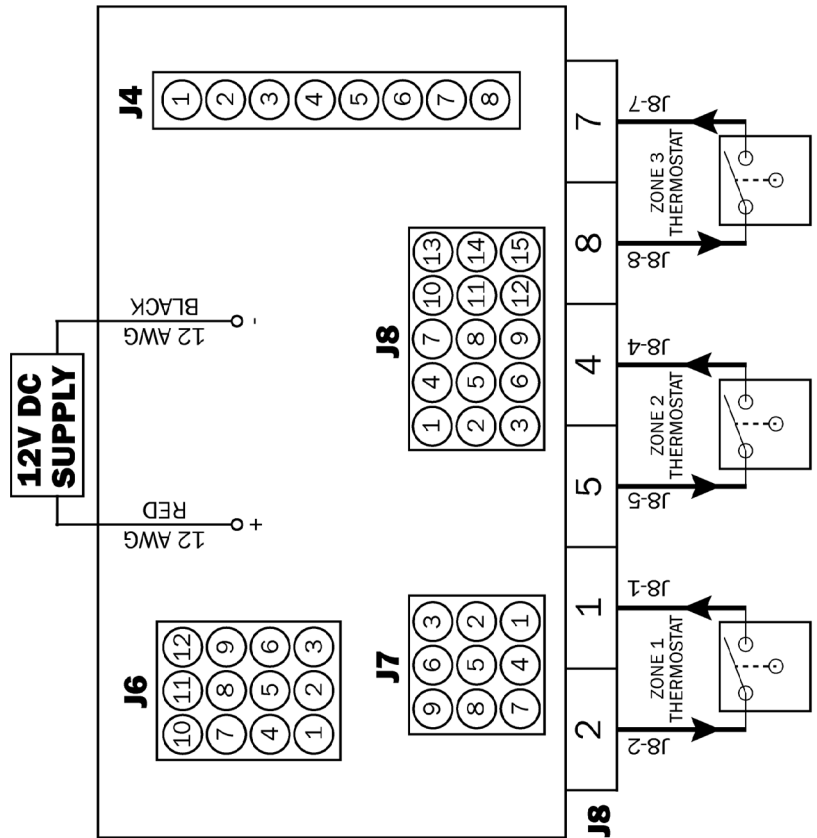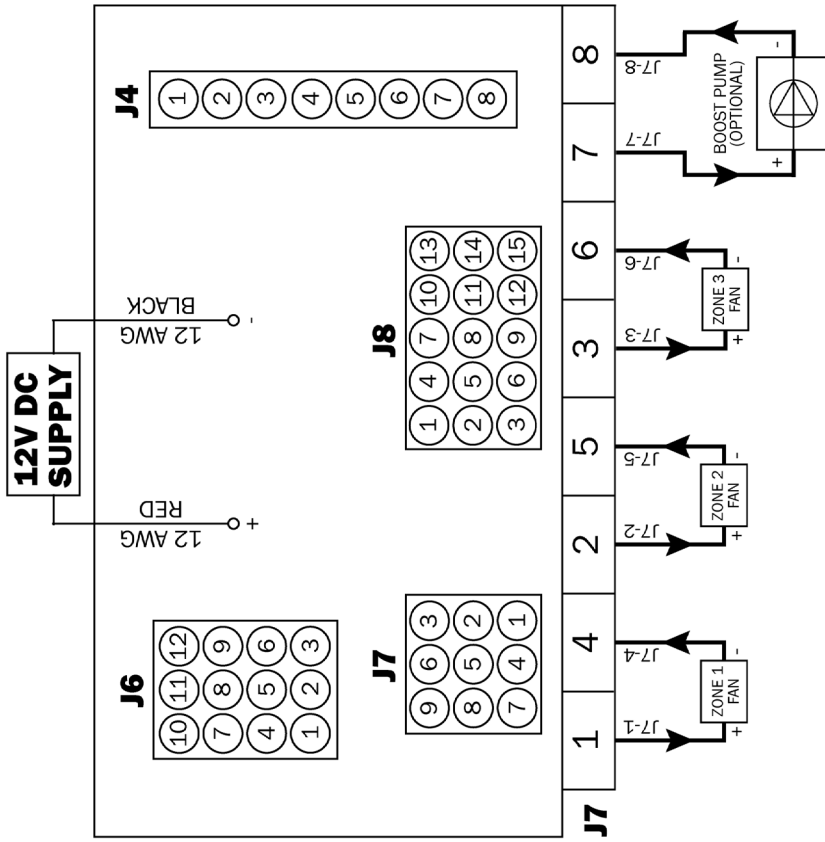


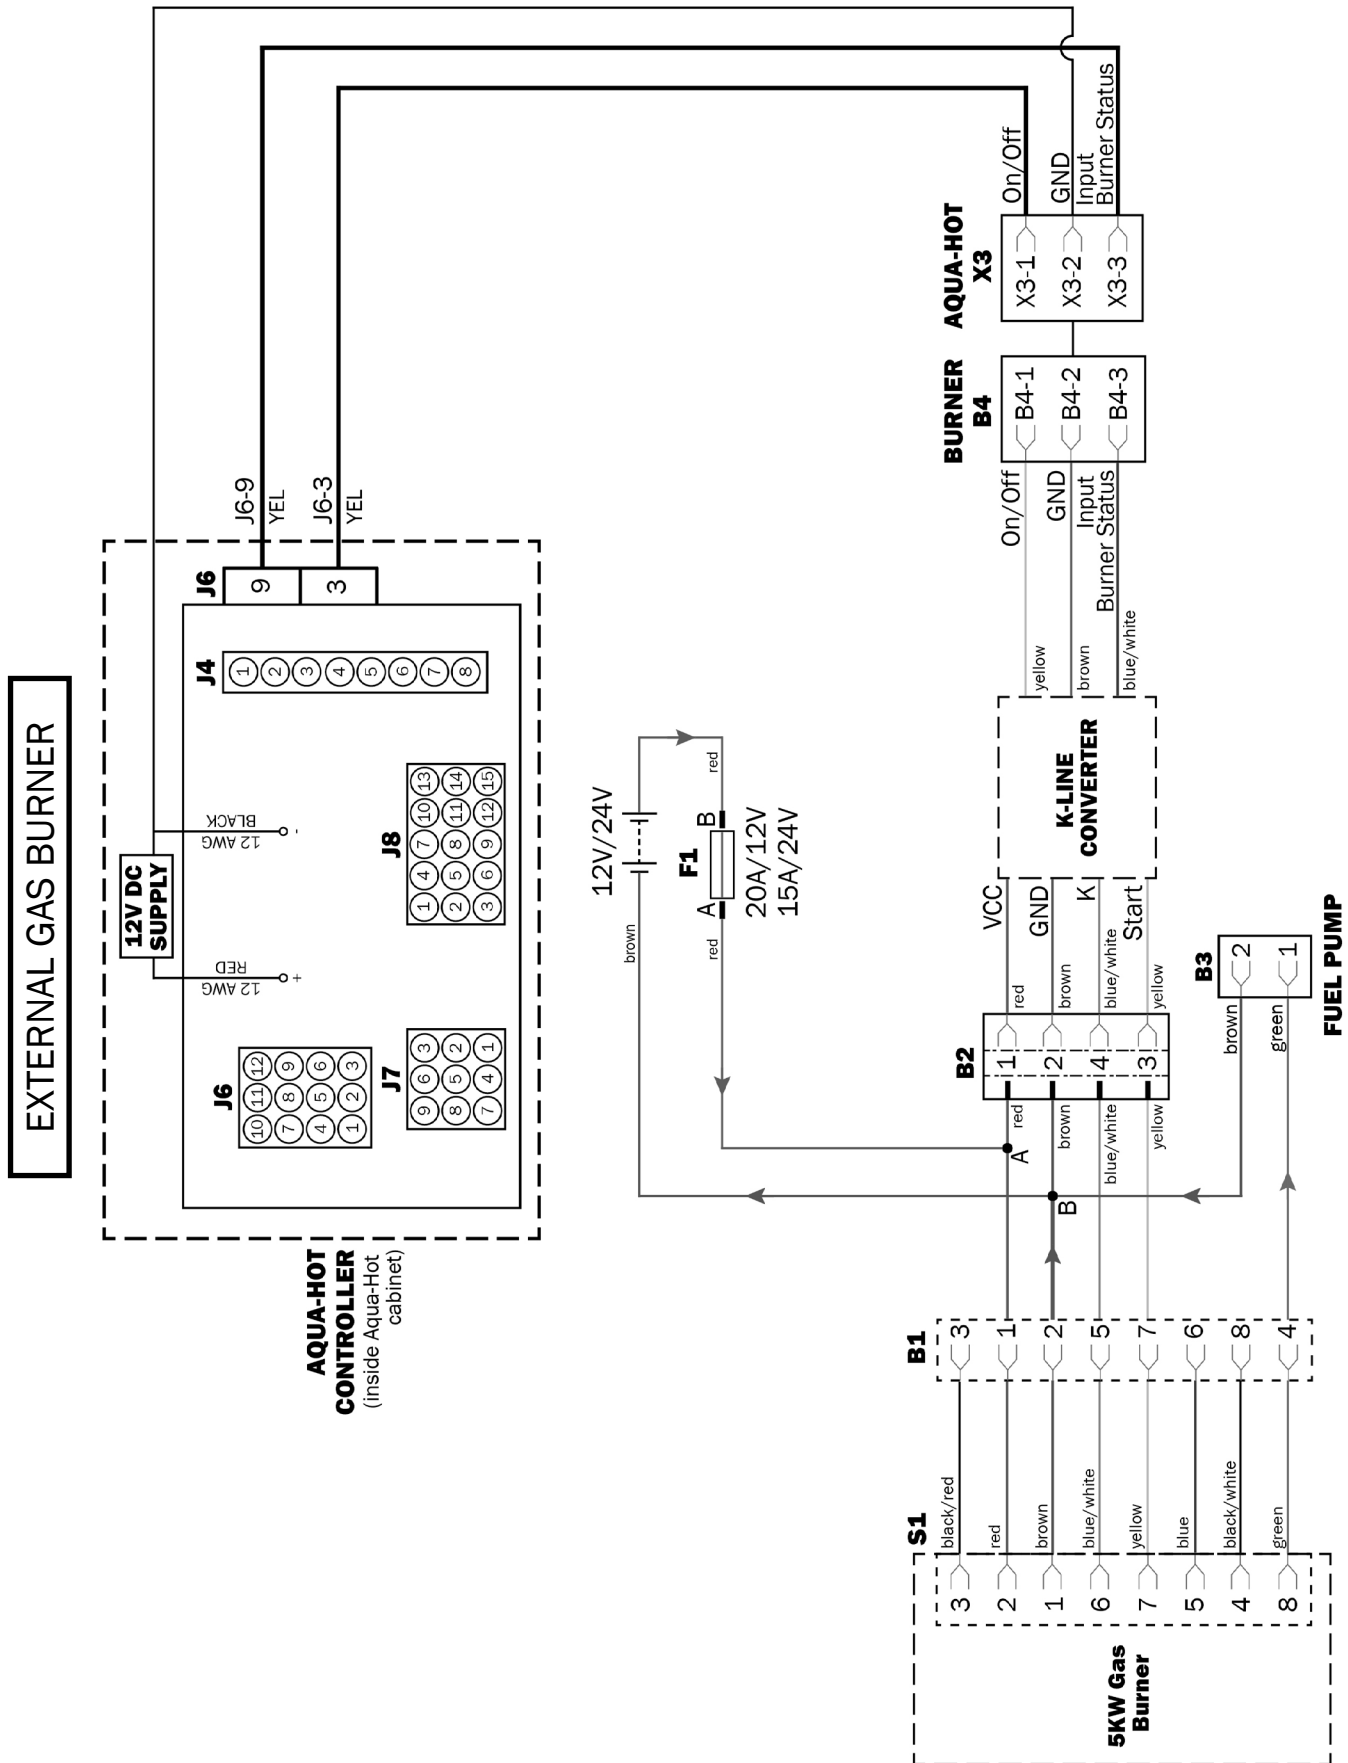

SENSORS, THERMOSTATS, ELECTRIC ELEMENT

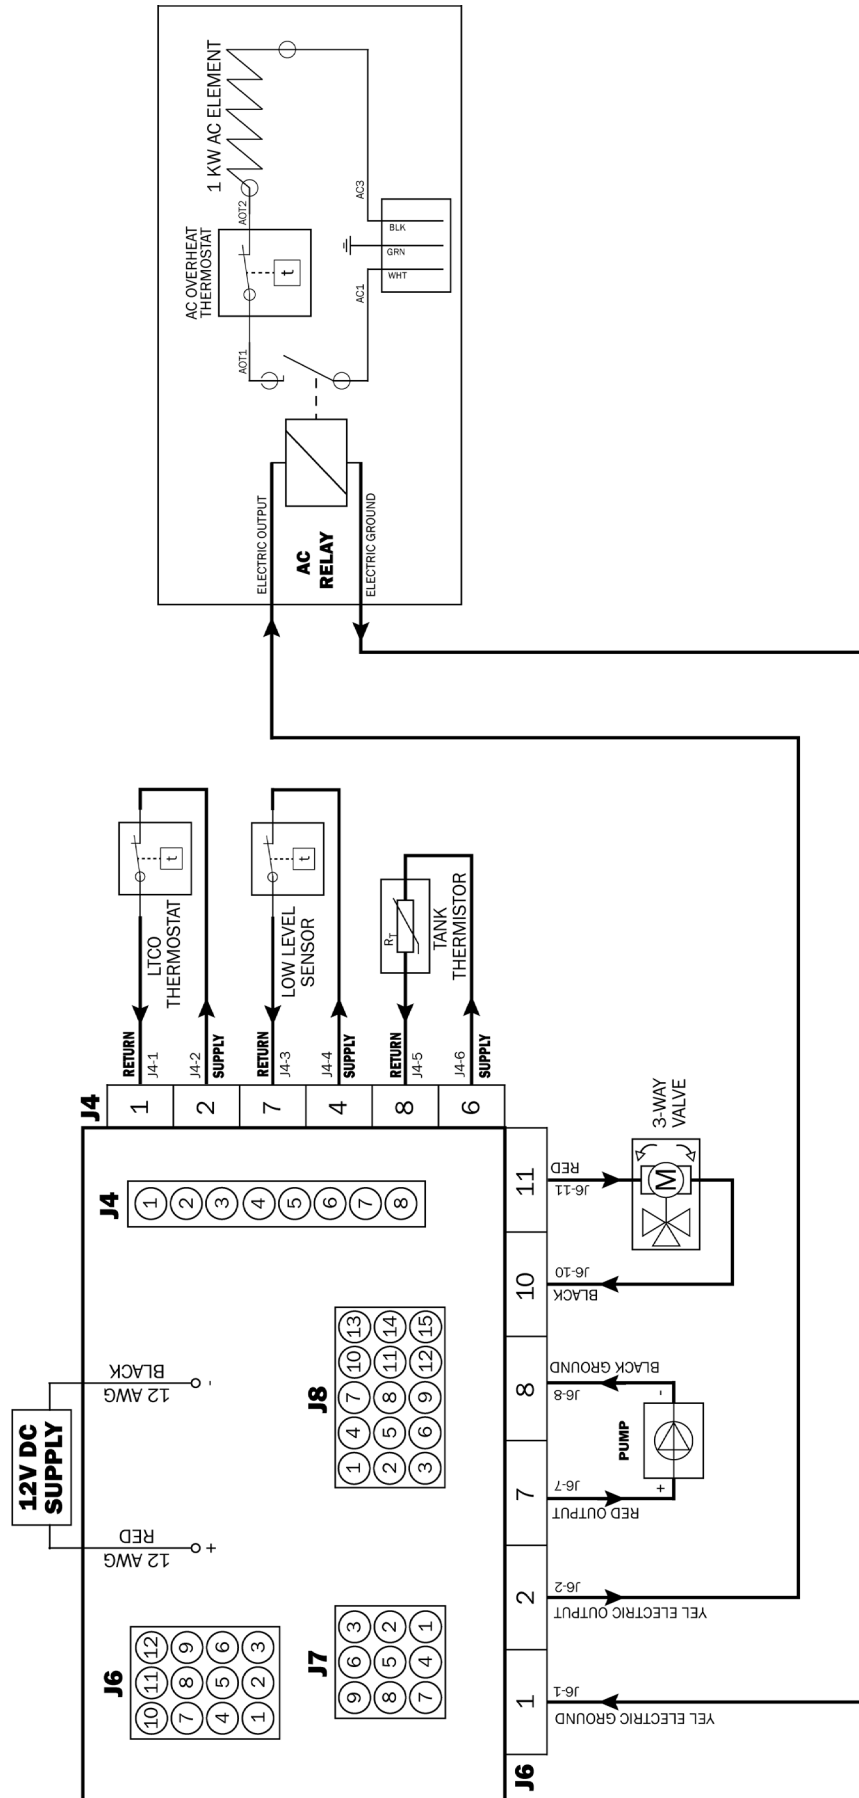

NOTE: For more parts & information, please reference the AHM-125-G02 Parts manual found online at aquahot.com/library.aspx.

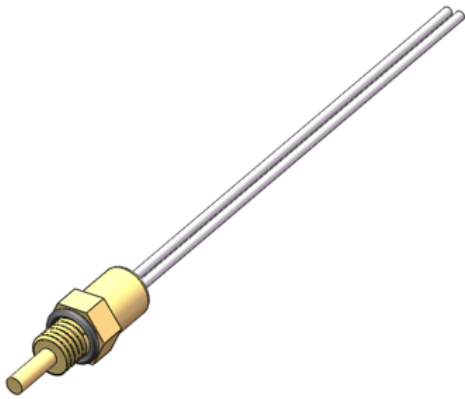

[ELE-014-712](#)

Thermistor, Tank Temperature Sensor



[ELX-THM-309](#)

Thermistor, 10K NTC, Room Temperature Sensor



[ELE-LCD-050](#)

Aqua-Hot LCD Screen, RVC 3.5in




[ELE-100-111](#)

RV-Side Wire Harness (optional)




[ELE-RVC-100](#)

RVC Display Cable

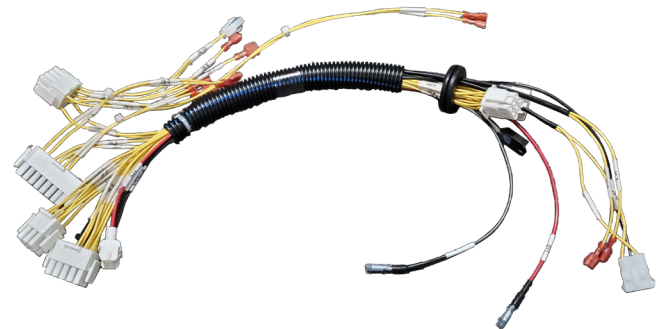


[ELE-DIV-100](#)

Aqua-Hot Series 125 Mainframe Harness




[ELE-HLT-125](#)

VAC High Limit Thermostat 215° F w/ Leads




[ELE-LTC-135](#)

Low-Temperature Cutoff Thermostat w/ Spade Terminals

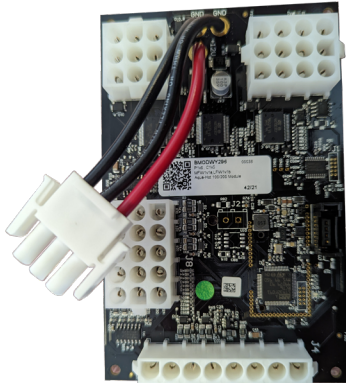


[ELE-100-M01](#)

Controller, 12VDC, 100-200 Series, Kit

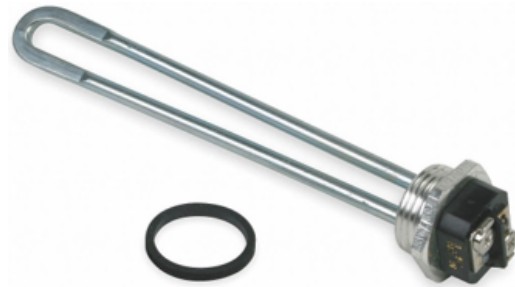

[ELX-2E7-102](#)

1500W, 120 VAC Electric Element, 1" NPSM

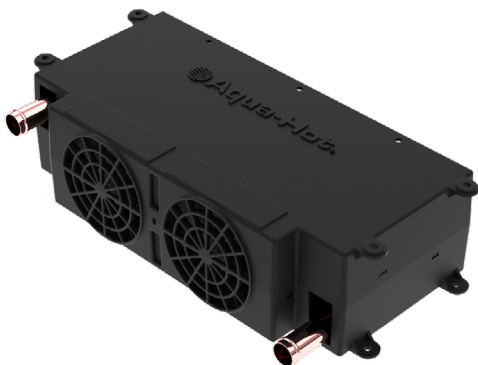

[EXE-103-OEX](#)

Heat Exchanger, Cozy III



[ELX-135-M01](#)

Float Switch Kit, 1/2" NPT w/ Quick Disconnect Terminal




[PLX-102-050](#)

Small Heat Exchanger, (2) 1/2" FNPT, (2) 2" MNPT



[PLX-100-900](#)

Fluid Circulation Pump




[PLX-111-125](#)

Pressure Relief Valve, 125 PSI




[ELE-400-900](#)

Harness, Buehler C20 Pump




[PLX-362-100](#)

Tempering Valve

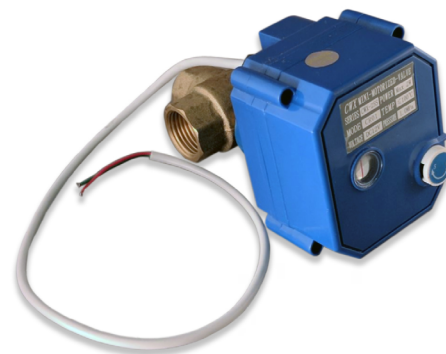


[PLX-251-M01](#)

Kit, Three-Way Motorized Valve, 1/2" NPT



[ELX-232-948](#)
AC Relay, 30A 277VAC



[SME-135-002](#)
Cover, AC Element Cover for 125 Series




[PLX-000-433](#)
Hose, 3/4" Safety Stripe, Rubber



[GBX-125-117](#)
Assembled Fuel Pump



[MSX-907-162](#)
Refractometer

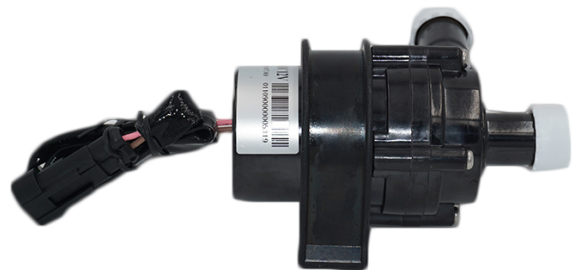

[GBX-125-103](#)
5kW Gasoline Burner Circulation Pump



[GBX-125-121](#)

Fuel Hose to Burner (clear) (Couplers & check valve included)



[GBX-125-122](#)

Fuel Hose to Fuel Tank (blue)




[HDX-102-111](#)

Clamp, (10.5mm), Soft Hose and Tube



[HDX-102-113](#)

Clamp, $\frac{3}{8}$ to $\frac{7}{16}$ (11.3mm), Soft Hose and Tube

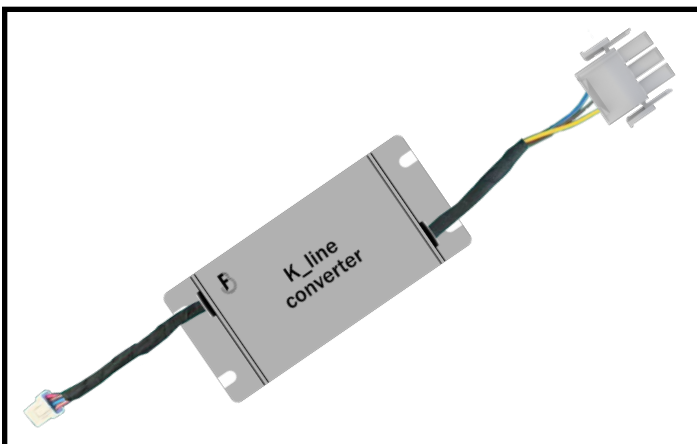

[GBX-125-102](#)


Burner K_Line Converter



[GBX-125-112](#)

Burner Wiring Harness

Measuring Antifreeze Using a Refractometer

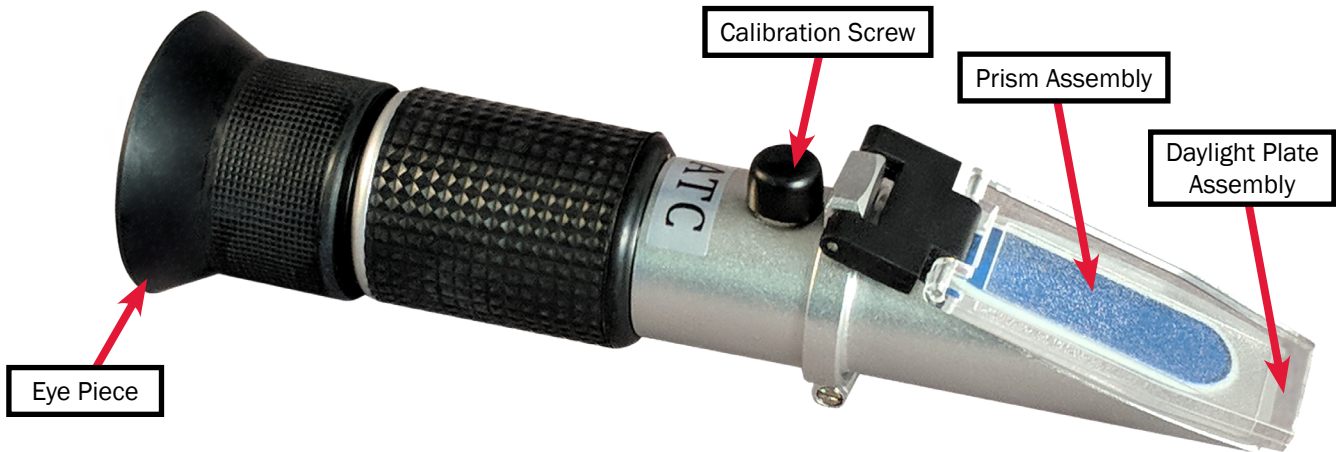


Properly Apply Antifreeze to the Prism Assembly



Use the guide below to properly apply the ethylene glycol mixture to the prism assembly of the refractometer. Once that is complete, peer through the eyeglass of the refractometer to continue to the next step.

Adjust the Boundary Line

Once the glycol solution has been properly applied, adjust the calibration screw until the boundary line labeled "Ethylene Glycol" is set to 32°F. The graphic to the right has been designed as an aid, but note that it may differ from what is shown in the refractometer sight glass.

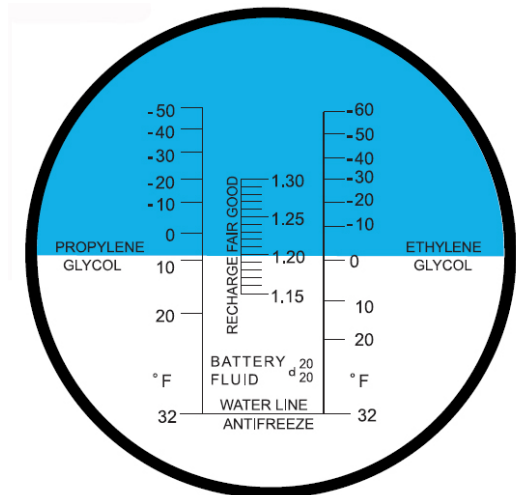

Application of Ethylene Glycol

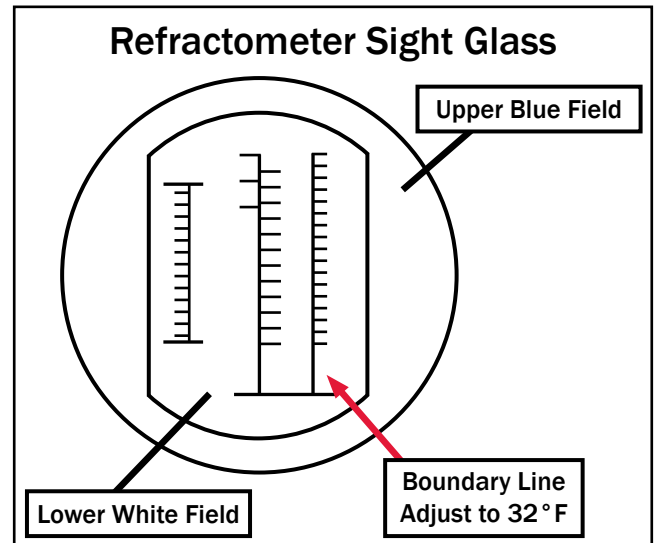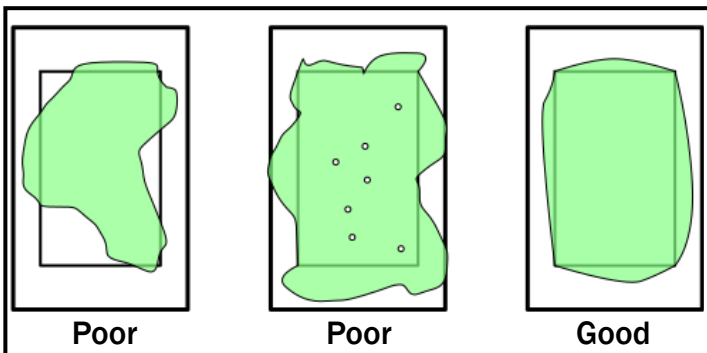



AQUA-HOT™ (2) YEAR LIMITED WARRANTY

Aqua-Hot Heating Systems Inc. warrants the AQUA-HOT heater to the original owner to be free from defects in material and workmanship under normal conditions of designed usage and service as outlined in the installation and operator manuals for a period of two (2) years covering both parts and labor beginning on the date of purchase of the vehicle by the original owner. Replacement parts are covered for the remainder of the heating systems warranty. All purchased replacement parts will carry a six months, (180) days warranty.

This warranty does not apply to scheduled maintenances items such as fuel filters and fuel nozzles, damage or failure of the AQUA-HOT heater or the vehicle into which it was installed due to improper installation, assembly, maintenance, abuse, neglect, accident, or the use of parts not supplied by Aqua-Hot Heating Systems, Inc. Aqua-Hot Heating Systems is not responsible for incidental or consequential damages.

The intent of this warranty is to protect the end user of the heating system from such defects, which might have occurred in the manufacture of the product. The warranty is not intended to protect the end user from problems, which are outside the ability of Aqua-Hot Heating Systems control.

To obtain a warranty repair authorization or information, please contact the Tech Support Department at 1-800-685-4298 (7:00am to 4:00pm Mountain Standard Time).

My Comfort Zones are On-Board

Vehicle:

Purchased From:

Dealer Information:

Name:

Location:

Phone Number:

Heating System:

Serial Number:



Scan the QR code on the right with your mobile device to take you to the website to register your Aqua-Hot product.

Service Manual

100_{SERIES}

 **Aqua-Hot**[®]
An AIRXCEL Brand



Aqua-Hot Heating Systems, LLC
7755 Miller Drive, Frederick, CO 80504

Visit us online at www.aquahot.com
Call us at (800) 685-4298 or (303) 651-5500

©2024 Aqua-Hot Heating Systems, LLC. Printed in the USA